DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	FAR0303	01.10.14	

TECHNICAL SPECIFICATIONS	SIGNATURE PRESIDENT (TECHNICAL)

FULL BODY HARNESS (FAR0303)

CE 0120

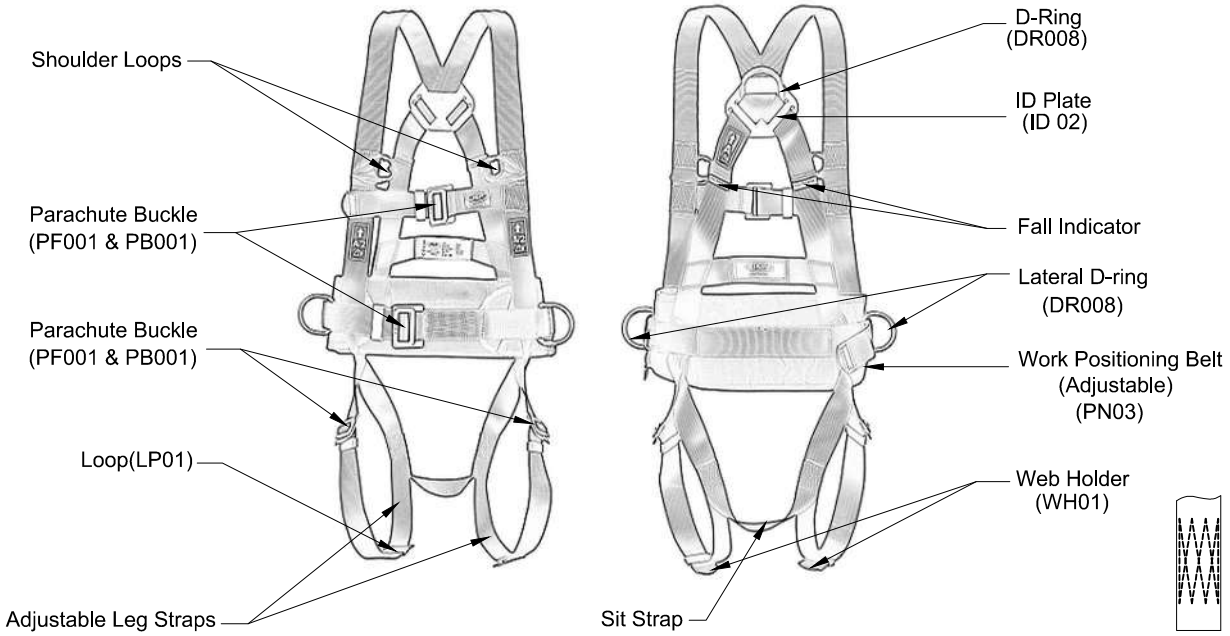

Tested as per EN 361: 2002 & EN 358:1999

STITCHING DESIGN
Size : Universal

DESIGN	• One dorsal attachment D-ring for fall arrest And textile loops in front for fall arrest. • Adjustable leg straps. • Work positioning belt for extra comfort adjustable. • Lateral D-ring for work positioning. • Sit Strap.		
WEBBING	• Material	:	Polyester.
	• Width	:	44±1mm.
	• Breaking strength	:	23 kN.
STITCHING THREAD	• Material	:	High-tenacity polyester.
METAL COMPONENTS	• Material	:	Alloy Steel .
	• Plating	:	Galvanized with Yellow/Silver Passivation.
	• Finish	:	Deburred & Shot Blasted.
VITAL TEST COMPLIANCE	• Static Strength	:	15 kN or 1,530 kgf for 3 Minutes at each attachment element.
	• Dynamic strength	:	Free fall from 4 meters height donned to a test dummy weighing 100 kg at each attachment element.
WEIGHT	•	:	1430 gm ±10 gm.

JSP
OXFORD, ENGLAND