Accessories - programming aids

UB-PROG2




Programming device

- For ultrasonic sensors series

UB300 UB400 UB500 UB1000 UB2000 UB4000 UB6000	-12GM -18GM40 -18GM75 -30GM -F54	-E4 -E5 -I -U	-V15

... whose teach-in input is on pin 2.

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:
  Window mode, normally open/normally closed function.
  One switching distance, normally open/normally closed function.
  Monitoring of the detection range.

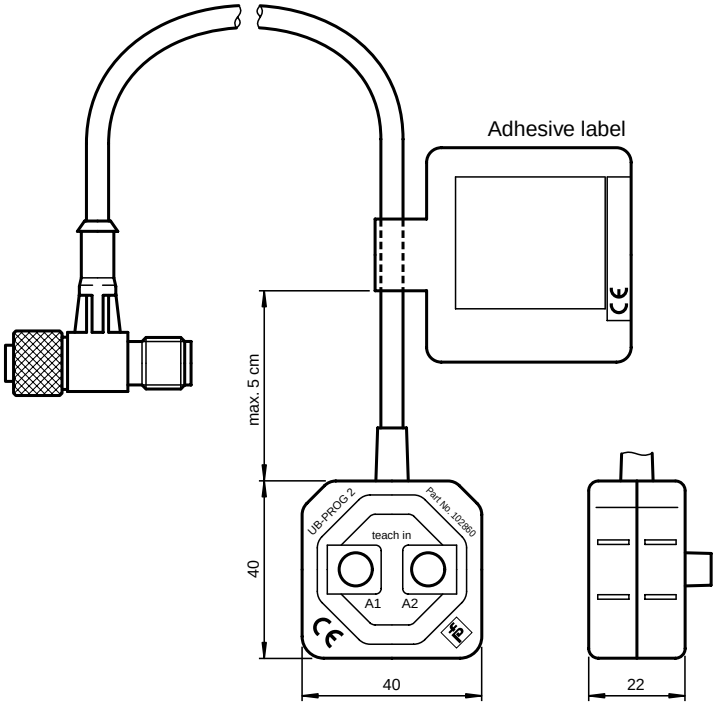

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.
The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.
The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.

UB-PROG3




Programming device

- For ultrasonic sensors series

UB500 UB1000	-18GM75	-E01 -E23 -E6 -E7	-V15

... whose teach-in input is on pin 5.

- Simple TEACH-IN of the switching distances A1/A2 or the measuring window.
- Simple selection of the output function:
  Window mode, normally open/normally closed function.
  One switching distance, normally open/normally closed function.
  Monitoring of the detection range.

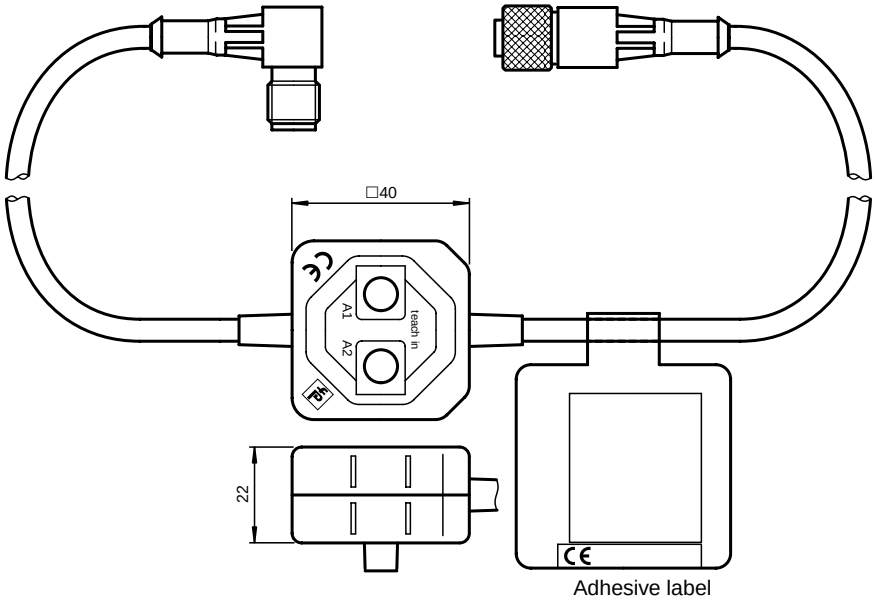

The unit can be switched from the V15 cable connection socket and the V15 plug connection on the sensor for the TEACH-IN procedure.
The switching distances/measuring window and output function can be taught in using the A1 and A2 buttons.
The taught-in switching distances and functions are retained when the programming unit is removed and/or the power is switched off.

Date of issue 05.08.2004

Subject to reasonable modifications due to technical advances. Copyright Pepperl+Fuchs, Printed in Germany
Pepperl+Fuchs Group • Tel.: Germany +49 621 776-0 • USA +1 330 4253555 • Singapore +65 67799091 • Internet http://www.pepperl-fuchs.com