ENGLISH

Datasheet

RS Pro Cartridge Fuse, F, 4A

RS Stock No: **537-1521**



Product Details

RS Pro cartridge fuse is current rated for 4 A. This F-speed, glass bodied fuse is ideal for protection of electrical circuits and consumer appliances.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

ENGLISH

Specifications:

Body Material	Glass
Breaking Capacity (at Maximum Voltage Rating)	40 A
Current Rating	4 A
Diameter	5.2 mm
Fuse Speed	F
High Rupture Capacity	No
Includes Indicator	No
Overall Dimensions	5.2 x 20 mm
Overall Length	20 mm
Resistance	0.0210 Ω
Size Designation	Miniature
Voltage Rating	250 V ac
Standards Met	BSI KM55676, CCC 2005010207155694, CSA 1803366, cURus E19180, IMQ CA03.00097, SEMKO 414552, VDE 40014109, RoHS Compliant

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

ENGLISH

5 x 20mm, Fast-Acting, Glass Tube Fuses

Dimensions - mm

Drawing Not to Scale

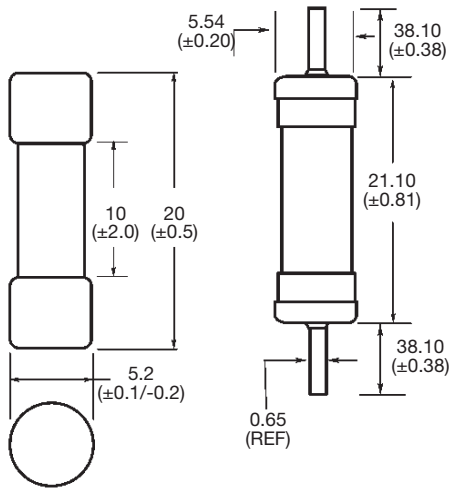

Time-current Curve

Nominal Time/Current Characteristics

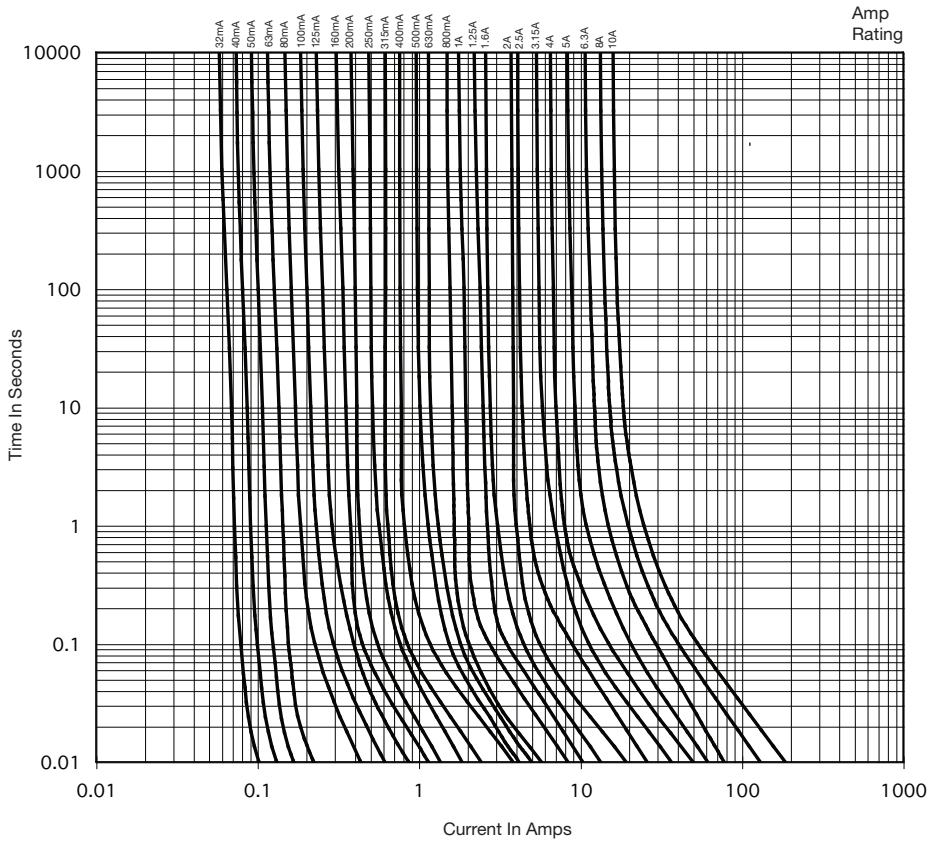

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.