DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RD/05	01	00	FAR0205	10.10.14	

TECHNICAL SPECIFICATIONS	SIGNATURE PRESIDENT (TECHNICAL)

FULL BODY HARNESS (FAR0205)

CE 0120

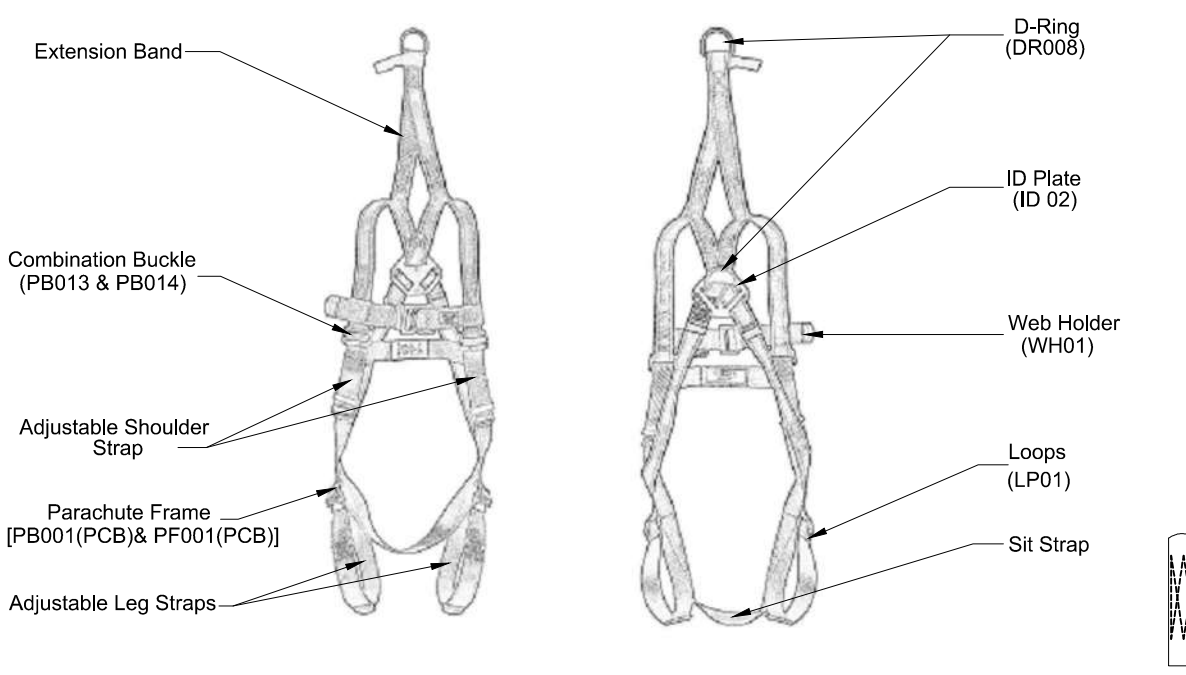

Tested as per EN 361: 2002

STITCHING DESIGN
Size : Universal

DESIGN	• One overhead D-ring for rescue. • One dorsal attachment D-ring for fall arrest. • One front D-ring for fall arrest. • Adjustable shoulder Straps. • Adjustable leg Straps. • Adjustable chest Straps. • Sit Straps		
WEBBING	• Material	:	Polyester.
	• Width	:	44±1mm.
	• Breaking strength	:	23 kN.
STITCHING THREAD	• Material	:	High-tenacity polyester.
METAL COMPONENTS	• Material	:	High strenth steel.
	• Plating	:	Zinc plated.
	• Finish	:	Deburred & polished.
VITAL TEST COMPLIANCE	• Static Strength	:	15 kN or 1,530 kgf for 3 Minutes at each attachment element.
	• Dynamic strength	:	Free fall from 4 meters height donned to a test dummy weighing 100 kg at each attachment element.
WEIGHT	•	:	1510 gm ±10 gm.

JSP®
OXFORD, ENGLAND