182.72.104.66NUP2..-EZylinderrollenlager


Cylindrical roller bearings NUP206-E-XL-TVP2 (Series NUP2..-E)


main dimensions to DIN 5412-1, locating bearing, separable, with cage


The datasheet is only an overview of dimensions and basic load ratings of the selected product. Please always observe all the guidelines in these overview pages. Further information is given on many products under the menu item "Description". You can also order comprehensive information via the Catalogue selection system (https://www.schaeffler.de/content.schaeffler.de/en/news_media/index.jsp) or by telephone on +49 (91 32) 82 - 28 97.

d	30	mm	
D	62	mm	
B	16	mm	
B_3	3	mm	
D_1	52,5	mm	
d_1	41,1	mm	
$D_{a\ max}$	56	mm	
$d_{a\ min}$	34	mm	
$d_{c\ min}$	44	mm	
E	55,5	mm	
F	37,5	mm	
$r_{1\ min}$	0,6	mm	
$r_{a\ max}$	1	mm	
r_{min}	1	mm	
m	0,219	kg	Mass
C_r	46000	N	Basic dynamic load rating, radial
C_{0r}	37500	N	Basic static load rating, radial

n_G	14200	1/min	Limiting speed
n_B	9600	1/min	Reference speed
C_{ur}	5400	N	Fatigue limit load, radial

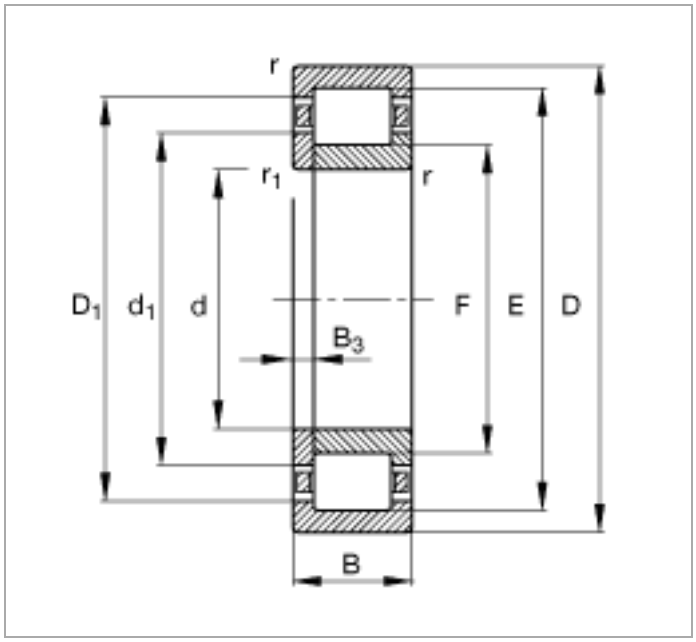

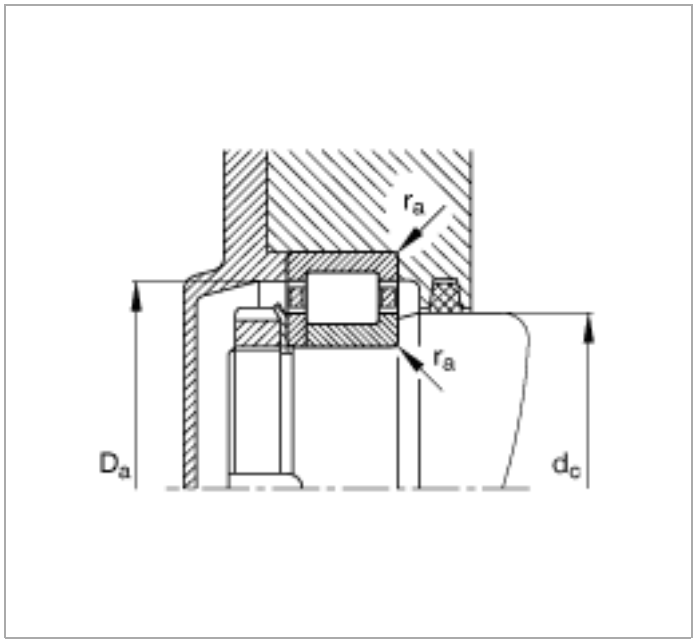

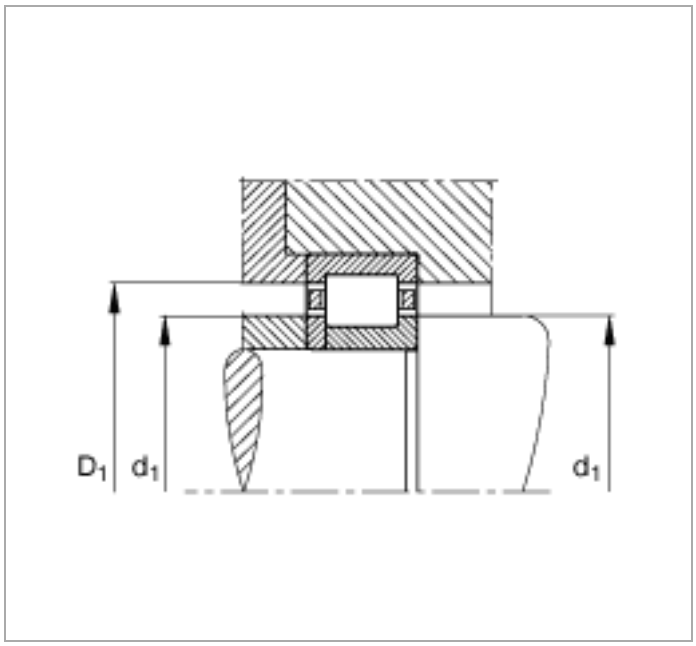
D1
d1
d1