
Specifications

Eaton 271072

Catalog Number: 271072

Eaton Distribution parts. Busbars 3Ph., for Z-SLS, PLHT, D0.-SO/.. (1, 5space units), 80A

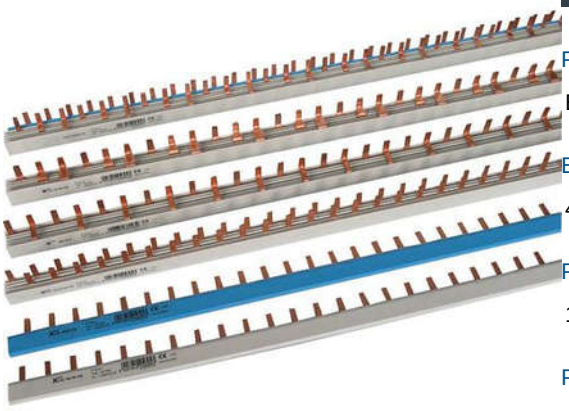

General specifications

Product Name	**Catalog Number**
Eaton Distribution parts	271072
EAN	**Product Length/Depth**
4015082710729	31 mm
Product Height	**Product Width**
16.4 mm	971 mm
Product Weight	**Compliances**
0.56 kg	RoHS conform

Powering Business Worldwide

Product specifications

Used with

D0…/3

Fuse Bases

Busbar block

Special features

For fuse bases, 3 pole

Type

Busbar block

Fuse Bases

Features

Insulated

Can be cut to size

Electric connection type

Pin

Rated surge voltage

4 KV

Rated uninterrupted current (Iu)

63 A

Suitable for number of devices

13

Number of poles

Three-pole

Color

Other

Rated short-time withstand current (Icw)

0 kA

Ambient operating temperature - max

55 °C

Ambient operating temperature - min

-25 °C

Cross section

16 mm²

Number of modular spacings

12

Number of phases

3

Resources

Declarations of conformity

DA-DC-03_Z-SV

DA-DC-03_Z-S_SC_SB

DA-DC-03_Z-S

Drawings

eaton-dimensions-versch-z-sv-16-35.jpg

eaton-3d-drawing-versch-slv-vlv-1.jpg

Pitch dimensions

0 mm

Rated operational voltage (Ue) - max

500 V

Rated conditional short-circuit current (Iq)

0 kA

Functions

Accessory

Busbar block

Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Eaton.com/socialmedia