
Decelect
L'évolution du raccordement

DATA SHEET
ref. SPE190836
4091094



MODULAR JACK RJ12 CAT3 UTP

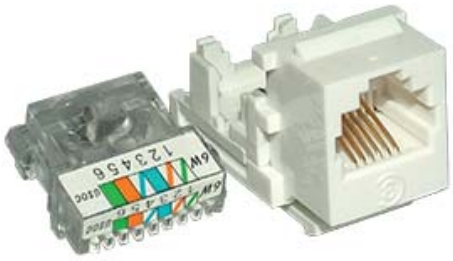

FEATURES

- **Standards :** ISO/IEC 11801 / EN 50173-1 / IEC 60603-7-4
- **Accept the gauge :** AWG24 solid wire
- **Housing material** : Polycarbonate UL 94V-0
- **Contacts** : Phosphor bronze
- **Gold-plated contacts** : 15µ over nickel barrier
- **Permissible voltage** : 1000V / 1Min
- **Permissible intensity** : 1,5A MAx
- **Insulation resistance** : 500MΩ
- **Operating temperature** : -40°C to +70°C
- **Overall dimension :** 33x17.5x21mm
- **Weight :** 5.5g

DESCRIPTION

Modular jack RJ12 CAT3 UTP

- Compact connector ''Keystone design'' with monobloc insert for 3 pairs.
- Fixing on ''Keystone panel''.
- Legibility of the location colour to avoid the errors of wiring.
- Very fast time of connection with supplied tool.
- RoHs

PACKAGING

10 items in thermo-sealed plastic bag with identication label.

CÂBLAGE CUIVRE