Datenblatt - Fiche technique - Data sheet

11.04.5649



ROLINE GOLD DisplayPort Kabel, DP ST - ST, 10,0 m

ROLINE GOLD Câble DisplayPort DP M - DP M, 10,0 m

ROLINE GOLD DisplayPort Cable, DP-DP, M/M, 10.0 m

由 Autodesk 教育版产品制作

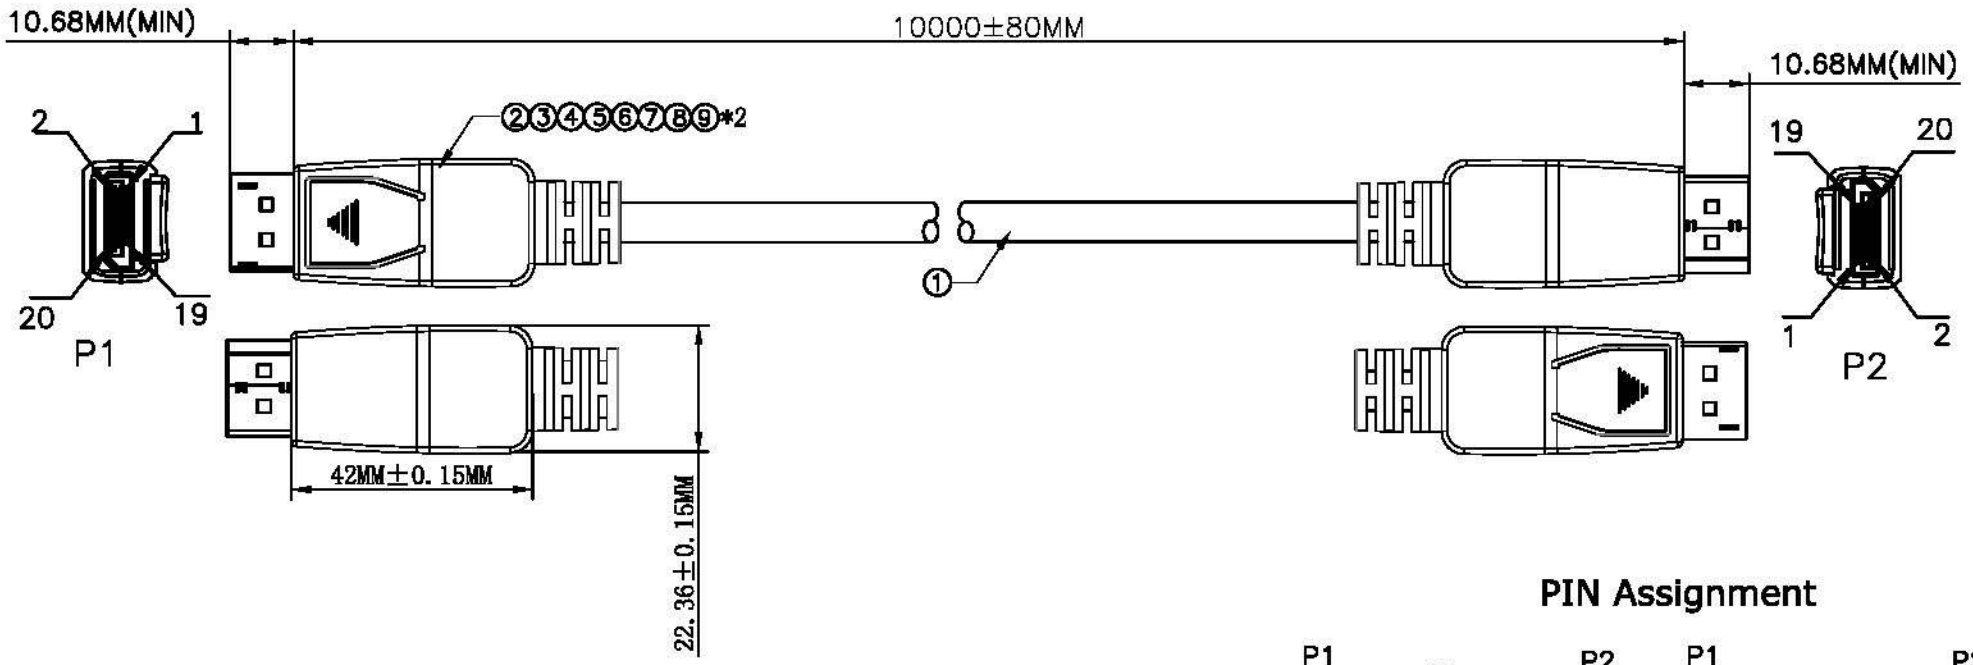

ELECTRICAL TEST:

1. 100% OPEN SHORT SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

PIN Assignment

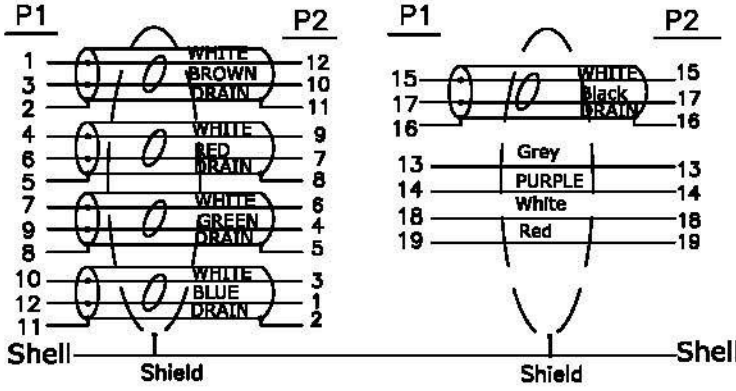

NO	DESCRIPTION	Q'TY	UNIT
9	black heat shrinkable casing~ ∮1.5MM	0.04	m
8	black heat shrinkable casing~ ∮1.0MM	0.1	m
7	black heat shrinkable casing~ ∮2.5MM	0.1	m
6	DisplayPort (DP1688#) M UP Shell ~ fine lines on the surface to ABS material to electroplating golden shell	2	pcs
5	DisplayPort (DP1688#) M DOWN SHELL~ appearance of fine lines to ABS material to electroplating golden shell	2	pcs
4	Transparent PE ROHS LDPE	5	g
3	45P BLACK PVC ROHS	12	g
2	DisplayPort Port M BLACK INSULATION SHELL PLATED:GOLD CONTACT:3u W/PCB	2	pcs
1	DP ~ UL20276 ~ [26AWG(7/0.16TC)+EAM]*5P+26AWG(7/0.16TC)*5C+AEB(16/8/0.12AL-MG 65% AL)~ OD:8.5MM ~ BLACK MARKING:DisplayPort Cable E342987 兄 AWM STYLE 20276 80℃ 30V VW-1W/GOLD/BLACK (32/3/0.2MM 3 Shares of gold sinistral without interval)	10.0	m

REV	ECN	DESCRIPTION	DATE	NAME

TOLERANCE	INCHES	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

SECOMP

ROLINE GOLD DisplayPort Cable
DP-DP, M/M, 10m, black

DRAWN BY	ZHWL	Item No.	11.04.5649
CHECK BY		SCALE	NONE
APPD BY		UNIT	MM
		DATE	2016.11.26

DRAWING NO.: C04089-00315

REV. A01

1/2

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作