

Product Data Sheet

*Unistrut ref: P1026** issue: D date: April 2012*

P1026**- ANGLE BRACKET

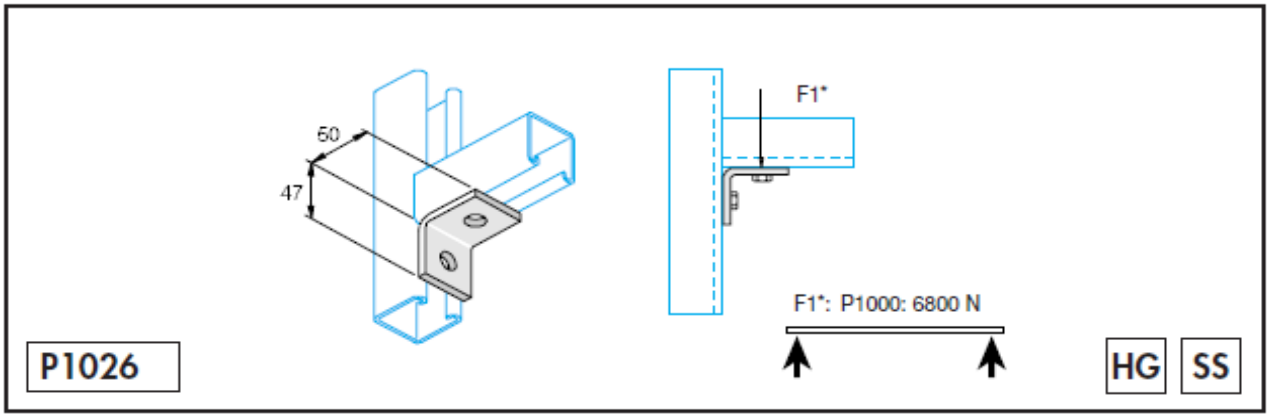

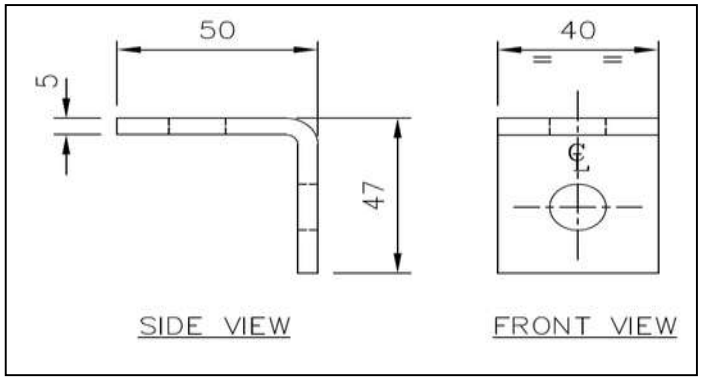

Unistrut Ref	Material:
P1026	Steel to BS EN 10149-2-S315MC or Q345
P1026/SS	Stainless Steel BS EN 10088-2-1.4404+2D (S316)

Unistrut Ref	Finish:
P1026	Hot Dip Galvanized to BS EN ISO 1461
P1026/SS	Self Colour - As material specification

Application: Drawings illustrate only one application for the fitting. In many cases other applications are possible.The channels shown in the application are P1000 (41 X 41) except where otherwise noted.
Loading data varies due to specific application, for all queries contact Unistrut UK.

Fixings:- All 14mm diameter holes use M12 grade 8.8 hex head screws with M12 - BSEN 10025 S275 or Q235 channel nuts.

Part Weight:- 0.124Kg

Box Weight: 2.48Kg

No. Per Box; 20

UNISTRUT HEALTH & SAFETY DATA SHEET REF'S :

No. 001 - PLAIN STEEL, PRE-GALVANIZED, GALVANIZED AND STAINLESS STEEL COMPONENTS
No. 099 - HOT DIP GALVANIZING (CHANNEL & COMPONENTS)
No. 102 - STEEL