stay connected

MIRO TEMP. CONVERTER PT100 - 2 /3-LEAD METHOD

IN: 0°C..+200°C - OUT:0..10 V / (0)4..20 mA

INPUT: 0...200 °C
Spring clamp terminals

Link to Product

Illustration



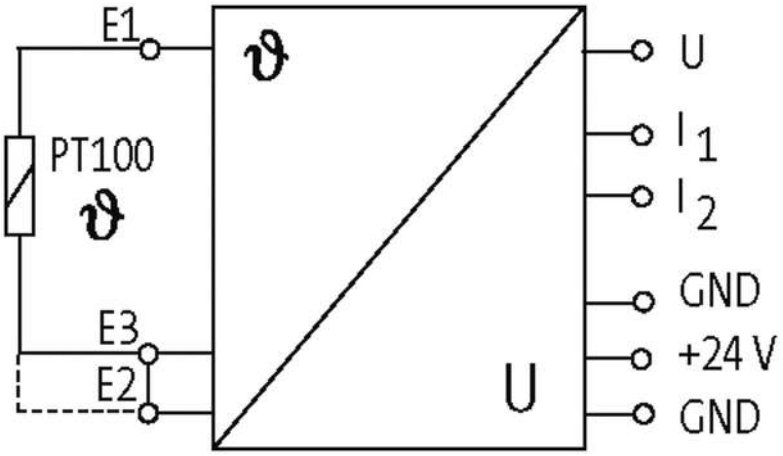

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

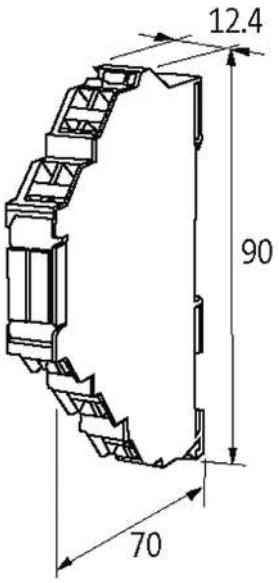

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C
Dimensions H × W × D	80×12.4×70 mm

Description	
Functional description	The Murrelektronik temperature converter module works in conjunction with a temperature sensor PT100 (IEC 751/EN 60751) and converts the temperature into a standard signal format of (0...10 V, 4...20 mA, 0...20 mA). The MTW modules supply a constant curre

Commercial data	
country of origin	CZ
customs tariff number	85437090
EAN	4048879022347
eClass	27210990
minimum order quantity	1

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 06/17

Murrelektronik Ltd. | Pendlebury Industrial Estate, Albion Street, Swinton | Manchester M27 4FG | Fon +44 161 72831-33 | Fax +44 161 72831-30 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk