RS Part Number: **9143923**

Europa Part Number: **PIR6W-24VDC-T**

Specifications and dimensions

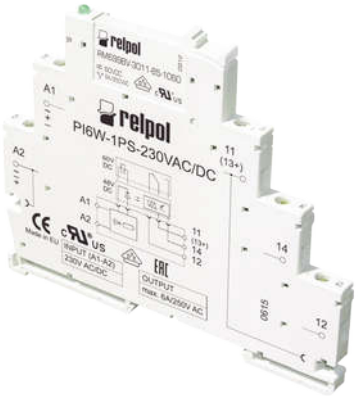

- SP Interface module with integral relay
- LED Indicator and Relay Ejector

RoHS Compliant

Features	
Height	98mm
Width	6mm
Depth	83mm
Weight	0.045Kg
Cover ingress protection	IP20
Contact arrangement	SPNO
Contact material	Triac Output
Rated switching voltage	400V
Minimum switching voltage	20V
Minimum switching current	10mA
Rated load AC1	1.2A
Rated voltage input	24V AC/DC
Rated power consumption of coil	0.3VA
Dielectric strength coil-contacts	4000 VAC
Operating time	10ms
Release time	10ms
Electrical life AC1	> 2 x 10^5
Mechanical life	> 2 x 10^7
Operating temperature	,-40°C to +50°C
Related products	
Replacement relay	RSR30-D12-A1-24-020-1
20 way commoning bar	ZGGZ20-RED
20 way commoning bar	ZGGZ20-BLUE
20 way commoning bar	ZGGZ20-BLACK

ⓘ **ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

Information provided in data sheets and/or specifications may vary from actual results in different applications and performance may vary over time. **All products must be installed according to manufacturers instructions.**

Europa House, Airport Way, Luton, Beds, LU2 9NH Tel: 01582 692 440 / Fax: 01582 692 450 e-mail: sales@europacomponents.com
website: http://**www.europacomponents.com**