THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	11/05/09	B.Puchaski

DESCRIPTION	MATERIAL	FINISH
SHELL	BRASS	NICKEL
BODY	BRASS	NICKEL
CENTER PIN	Phosphor Bronze	GOLD
SLEEVE	BRASS	NICKEL
INSULATOR	TEFLON	---
GASKET	Si-RUBBER	ORANGE
RETAINING RING	BRASS	NICKEL
RESISTOR	50 Ohm	---

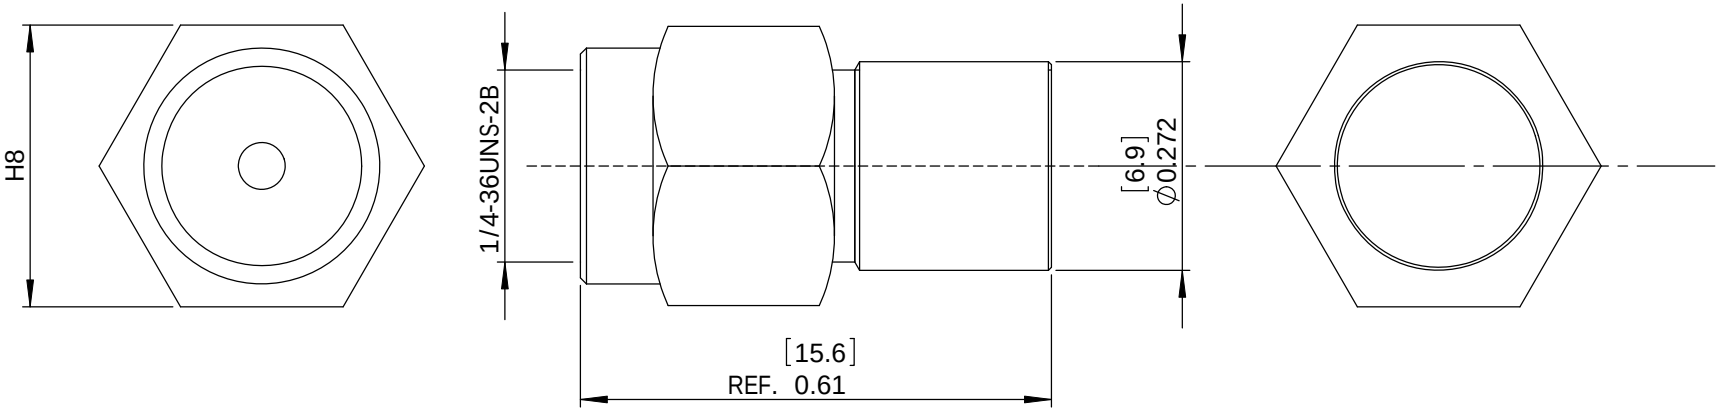

NOTES:

ELECTRICAL:
IMPEDENCE: 50 OHMS
FREQUENCY RANGE: 0~6 GHz
VSWR: ≤1.50 @ 0~6 GHz
POWER RATING: 1 WATT

MISCELLANEOUS:
COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
DIMENSIONAL TOLERANCES:
.X = ±.1
.XX = ±.01
.XXX = ±.005
ANGULAR TOLERANCES:
ALL = ± 1°
PROJECTION

APPROVALS	DATE
DRAWN BY B.Puchaski	09/22/09
CHECKED BY M.Audas	09/22/09
APPROVED BY M.Audas	09/22/09

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY
CONNECTOR

PRODUCT DESCRIPTION
50 Ohm RP-SMA PLUG TERMINATOR

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	ARSP-TERM	A

SCALE: NONE | CAD FILE: ARSP-TERM.SLDDRW | SHEET 1 OF 1