

87045 LIMOGES Cedex
Phone : +33 (0) 555 0687 87 – Fax : +33 (0) 555 0688 88

Desktop multi-outlets new design

Number(s) :

0 535 98- 0 546 00/01/15/16/20/21/25/26/27/28/29/31/33/35/36/37/ 90/91/92/99 - 6 535 60 à 63

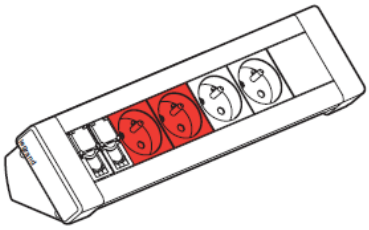

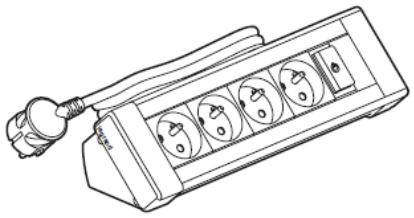

CONTENTS PAGES

1 Range	**1 to 2**
2 On demand	**3**
3 Technical characteristics	**3 to 5**
4.Material characteristics	**5**





1. RANGE

Desktop multi-outlets :
- an ideal solution dedicated to nomadic people and/or satisfy a aesthetic needs.
- products answering all needs (pre-wired, to wire, empty or on demand)
- a specific accessory allowing to fix the product on the desk
- a reliable and secure installation with conformity to NFC 61-314
- index of protection: IK07
- Finishes available :
  - . natural anodized aluminium
  - . wiring devices and plastic parts colour white RAL 9003

Packaging : 1




1.1 Desktop multi-outlets
1.1.1 Prewired

Supplied without cord
Connection on terminal blocks with cable grip

Numbers	Dimensions Lxlxh (mm)	Functions
0 546 00	280X90x80	
0 546 01	370x90x80	
0 546 15	280x90x80	
0546 16	330x90x80	
0546 20	330x90x80	
0546 21	460x90x80	

1. RANGE (continued)
1.1.2 With cords

Supplied with cord
Connection on terminal blocks with cable grip

Numbers	Dimensions Lxlxh (mm)	Functions
French std 0 546 25 German std 6 535 60	280x90x80	
French std 0 546 26 German std 6 535 61	370x90x80	
German std 6 535 63	330x90x80	
French std 0 546 27	280x90x80	
French std 0 546 28	370x90x80	
French std 0 546 29	370x90x80	
French std 0546 35 German std 6 535 62	280x90x80	
French std 0546 36	330x90x80	
French std 0546 33	330x90x80	
French std 0 546 31	280x90x80	
French std 0 546 37	370x90x80	


1. RANGE (continued)

1.1.3 Empty to be equipped


Numbers	Dimensions Lxlxh (mm)	Functions
0 546 90	240x90x80	
0 546 91	330x90x80	
0 546 92	420x90x80	

1.2 Accessories


1.2.1 Fixing accessory Number 0 546 99



if L > to 400 mm use 2 x 0546 99



Allow fixing on a desk from 6 to 40 mm of depth



The product includes adhesive protections for desk office surfaces.

Material characteristics of 0 546 99 :

- Steel (painted grey)
- Polyamide
- Elastomer

Packaging : 1

1. RANGE (continued)

1.2 Accessories

1.2.2 Cable worm number 0 535 98



Very suitable solution for a safe and aesthetic protection of the cabling between desk and floor.

Packaging : 1

Length : 0.75m


Cabling capacity :
- minimum dimension of cable : 2x0,5 mm² (5mm diameter) 20 each side
- maximum dimension of cable: 5x2,5 mm² (14mm diameter) 3 each side

Material Characteristics of Nr. 0 535 98

Ring white colour : ABS + *thermoplastic polyurethane (for the membrane)*
- Fixation accessory: ABS
- Base : plastic part = EPDM
  Metal plate = FE


2. ON DEMAND

Selection of desktop multi-outlet new design

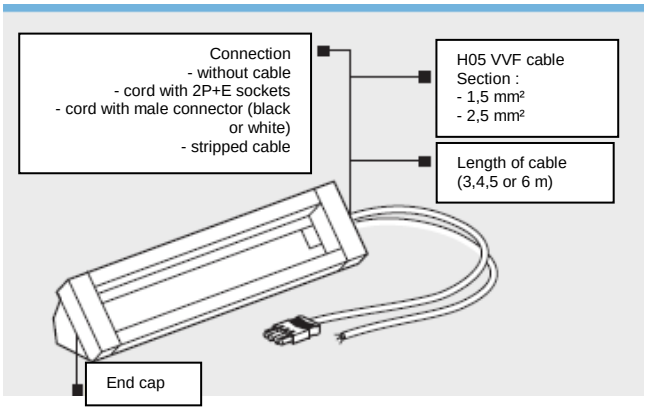

The length of the unit varies depending on the quantity of functions needed.

Selection of functions

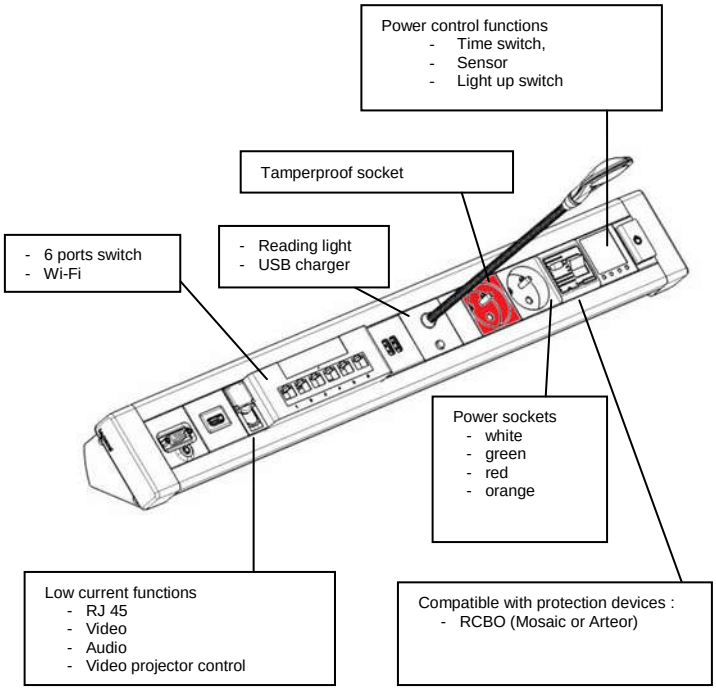


3.TECHNICAL CHARACTERISTICS (continued)

3.1 Connection


Use 3G1,5 mm² or 3G2,5 mm²

3.1.1 With 2 power circuits and RJ45 plugs

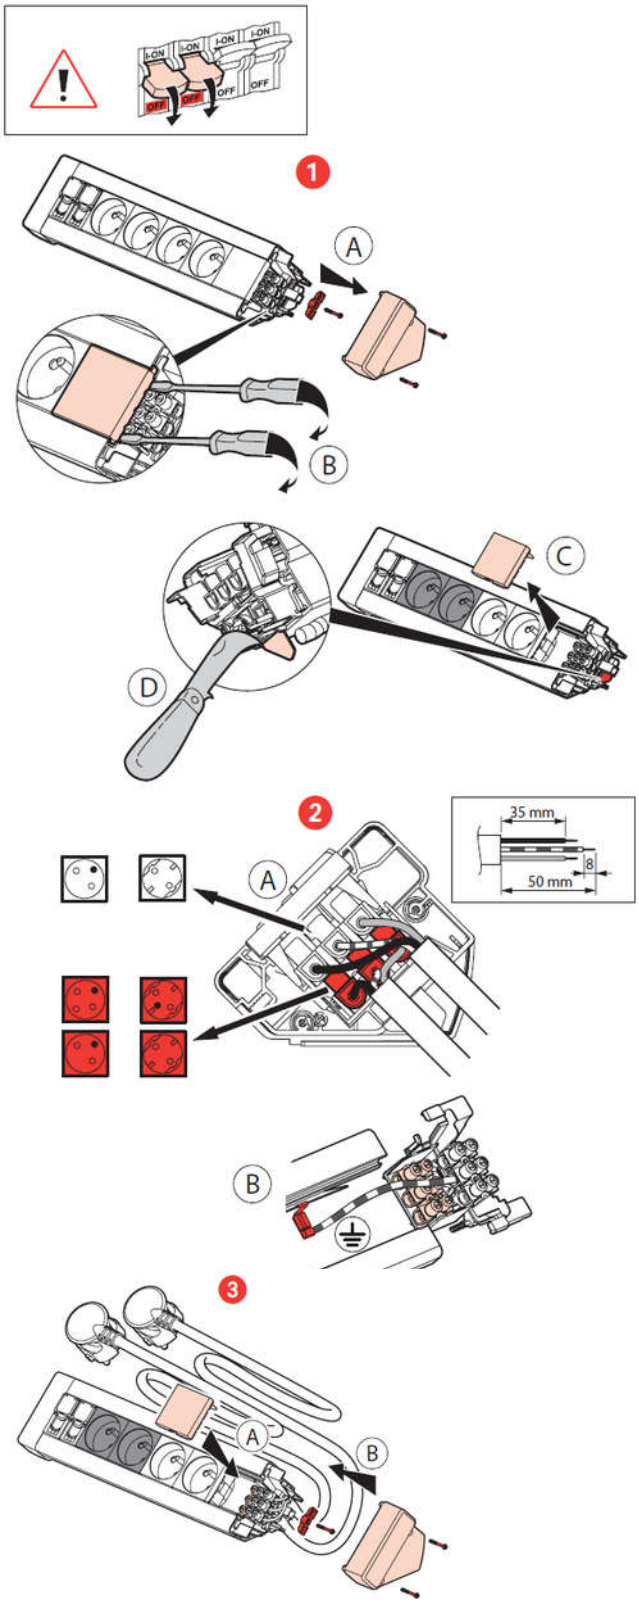


3.TECHNICAL CHARACTERISTICS (continued)


3.1.2 Connection of data sockets through the end cap

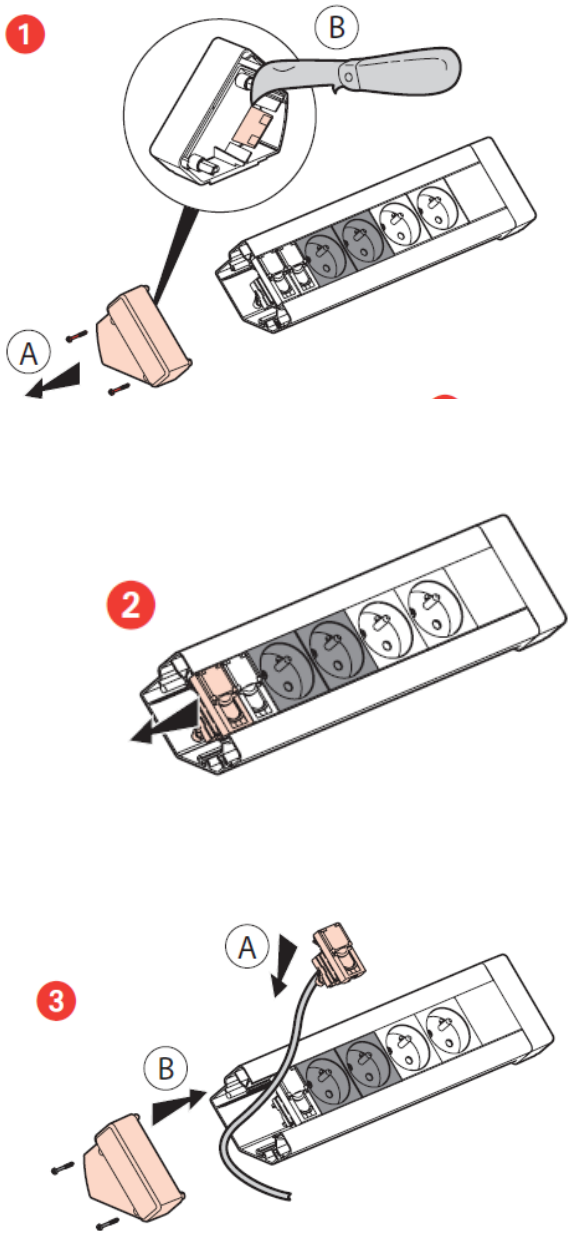

3.TECHNICAL CHARACTERISTICS (continued)

3.1.3 With 1 power circuit

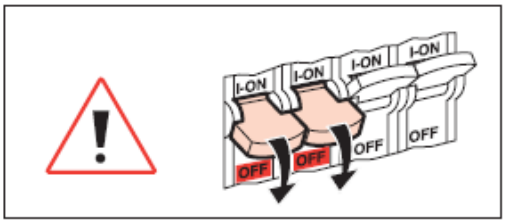

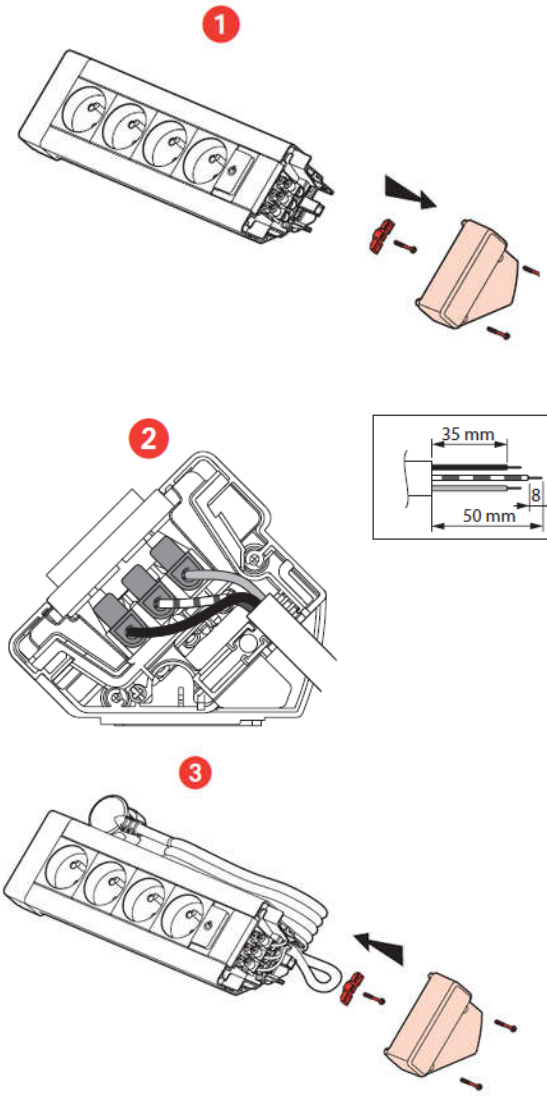

3.TECHNICAL CHARACTERISTICS (continued)


Maximum power : 16A 3680W in 230V

If delivered with cord :

Cable type : 3 meters HO5 VVF 3G 1.5 mm²
Plug type : 2P+T side outlet plug

Other plugs available on demand

Power on the right side (2 cables entries)

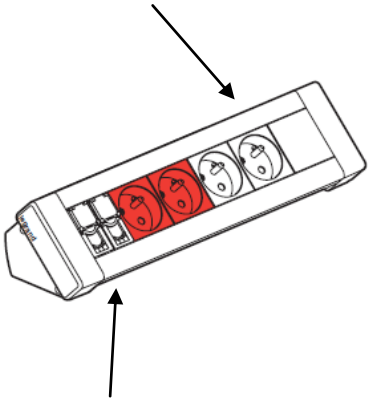

Data on the left side

If not delivered with cord :

Possibility to connect with :

HO5 VVF 3G 1.5 mm² or 3G 2.5 mm² (2 entries max)

4. MATERIAL CHARACTERISTICS

Standard product or on demand, natural anodized aluminium
End caps : white ABS
Cable grip : ABS
Terminal blocks : Polypropylene
Light switch : white PC