
Datasheet

Pt100 Probe

SPCS-2M



SELF ADHESIV

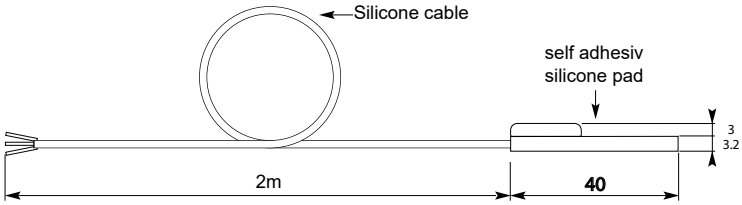

Part Number : SPCS-2M

Product description : Self Adhesive Probe 1xPt100 class A with 2 meters silicone / silicone cable

Product detail : Self Adhesive Probe 1xPt100 3 wire class A following CEI60751
Silicone Pad self Adhesive 40x13 mm with 2 meters silicone / silicone cable
Operating temperature -50 +180°C


SPECIFICATIONS

Attribut	Value
Sensor Type :	Pt100
Minimum Temperature Sensed :	-50°C
Maximum Temperature Sensed :	+180°C
Termination Type :	Cable
Cable Lenght :	2m
Probe Material :	silicone
Process Connection :	adhesiv
Number Of Wires :	3
Accuracy :	Class A

RDT probe

Silicone Self Adhesive



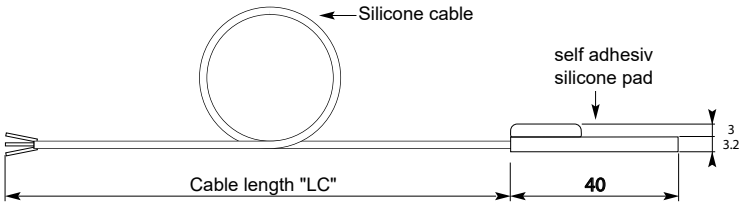

SELF ADHESIV

OPTIONS

- Others cable lenght on request

NEW

Silicone Pad Self Adhesive size:	40 X 13 mm
Probe :	Pt100 DIN IEC 60751 class A single wiring 3 wire
Connection Cable :	insulation silicone/silicone 3x0,22 mm²
Lenght :	2, 5 ou 10 meters
Operating Température :	-50/180°C

"Lc"


Ref. SPCS- [ ] M

2 meters	2
5 meters	5
10 meters	10

RTD sensor

Fastening by eyelet



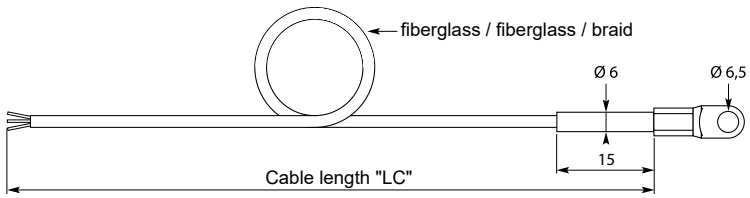

OPTIONS

- Autre longueur de câble sur demande

"Lc"

Ref. SPPO [ ] M

2 meters	2
3 meters	3
4 meters	4
5 meters	5

Protective sheath :	stainless steel 316 L - Ø 6 x 25 mm
Probe :	Pt100 DIN IEC 60751 class A, simple
	Fastening by nickel brass eyelet Ø 6,5 mm (2 or 4 wire on request)
Connection Cable:	fiberglass / fiberglass / braid
Operating Température :	+450 °C