PRODUCT DETAILS

**ARTICLE: 35606**

# WHEEL AS 100X40/40 INOX RB FIXED X40L/50 INOX FORK



### Wheel series AS

Wheels with cast soft polyurethane coating 87 Sh.A on polyamide 6 center.
Wheel fitted with stainless steel roller bearing.

### Castor series INOX40

Inox 40 series, polished stainless steel forks, swivels assemblies with double races & 'water resistant' protections. Finish: polished.

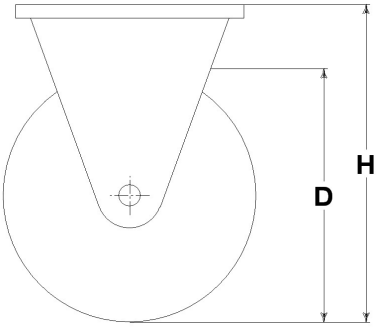


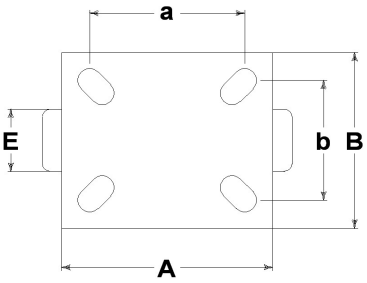


### Technical data

| | | |
|---|---|---|
| Wheel diameter | D | 100 mm |
| Tyre width | E | 40,0 mm |
| Bore diameter | d | 15 mm |
| Weight article | | 0,770 kg |
| Hub width | L | 40 mm |
| Overall height | H | 137 mm |
| Top plate outer dimensions | AxB | 105x85 mm |
| Bolt hole spacing | axb | 76x55 mm |
| Bolt hole spacing | axb | 80x60 mm |
| Fixing bolt diameter | g | M8 |
| Fork width | U | 50 mm |
| Load Capacity | | 250 kg |

**Related Articles**

Spare part wheel: 35058X

**GENERAL INFORMATION / RECOMMENDATIONS AND WARNINGS**
The cited text and the complete catalogue in their most up-dated versions are available in the OEM's website page www.lagspa.it/downloads. The dimensions, descriptions, specifications and illustrations herein are indicative and subject to variations without notice. The fact that products are illustrated herein does not necessarily imply they are available from stock nor does it place us under any obligation to supply them.
Tests carried out refer to the original products with original accessories: the replacement of one of the components with others of different manufacture might prevent the same results from being achieved and will automatically invalidate any guarantee. Please contact our technical service concerning any special application.