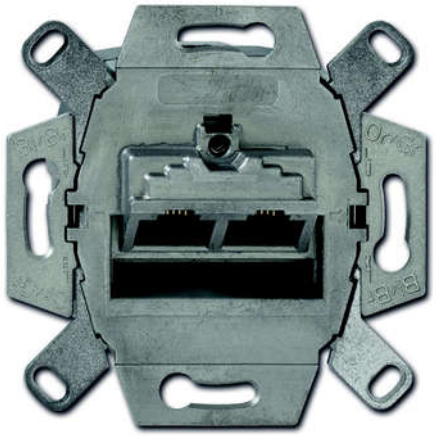

Flush-mounted Inserts
Data communication
Data-connection box, RJ 45, cat. 6a iso, shielded
2 x outlets, 8/8-pole

With down-leading outlet and LSA self-cutting clamps.
RJ-45 terminals for networks according to Cat 6A, Class EA (10 Gbits/s / 500MHz).
Equates to cat. 6a, Class EA according to ISO/IEC 11801:2011-06.
Terminal marking A and B according to TIA/EIA-568-B.2.
Typ according to EN 60 603-7-51:2011-01.
Shielding according to DIN EN 55022, Class B.
Up to 500 MHz on all pairs of wires.
Suitable for 10-Gigabit Ethernet.
Suitable for PoE+ according to IEEE 802.3at, >- 1.000 contact durability.
Flex cable entries from all sides without buckles.
Earthing of housing via 6,3 mm blade terminal at the back possible.
Re-embedded proofed.
Suitable for Mix-and-Match operation.
Suitable for RJ 11, RJ 12 und RJ 45.
For data cables with a diameter of 6 -10 mm.
For trunk systems, flush-mounted wall boxes and underfloor systems.
For wires of AWG 24-22.
Without claws.
Mounting depth: 31 mm.

Suitable for cover plate 1803-02-xxx.

Order Code : 0230-0-0412
Article No. : 0218/12-101-507
EAN: 4011395163887