Selector switch protective shroud

Part no.	**M22-XGWK**
Article no.	**231274**
Catalog No.	**M22-XGWKQ**

Delivery programme

Product range	RMQ-Titan (drilling dimensions 22.5 mm)
Basic function	Accessories
Basic function accessories	Guard-ring
Single unit/Complete unit	Single unit
Function	To protect against accidental operation
Protection type	IP66
For use with	For pushbutton and selector switch actuators (button plates cannot be used)
Connection to SmartWire-DT	no

Approvals

Product Standards	IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.	E29184
UL Category Control No.	NKCR
CSA File No.	012528
CSA Class No.	3211-03
North America Certification	UL listed, CSA certified
Degree of Protection	UL/CSA Type 3R, 4X, 12, 13

Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Accessories for control circuit devices (EC002024)
Electric engineering, automation, process control engineering / Low-voltage switch technology / Low-voltage switch technology (accessories) / Control circuit devices (accessories) (ecl@ss8-27-37-92-16 [ACO043007])

Type of electrical accessory	-
Type of mechanical accessory	Protective collar

Dimensions

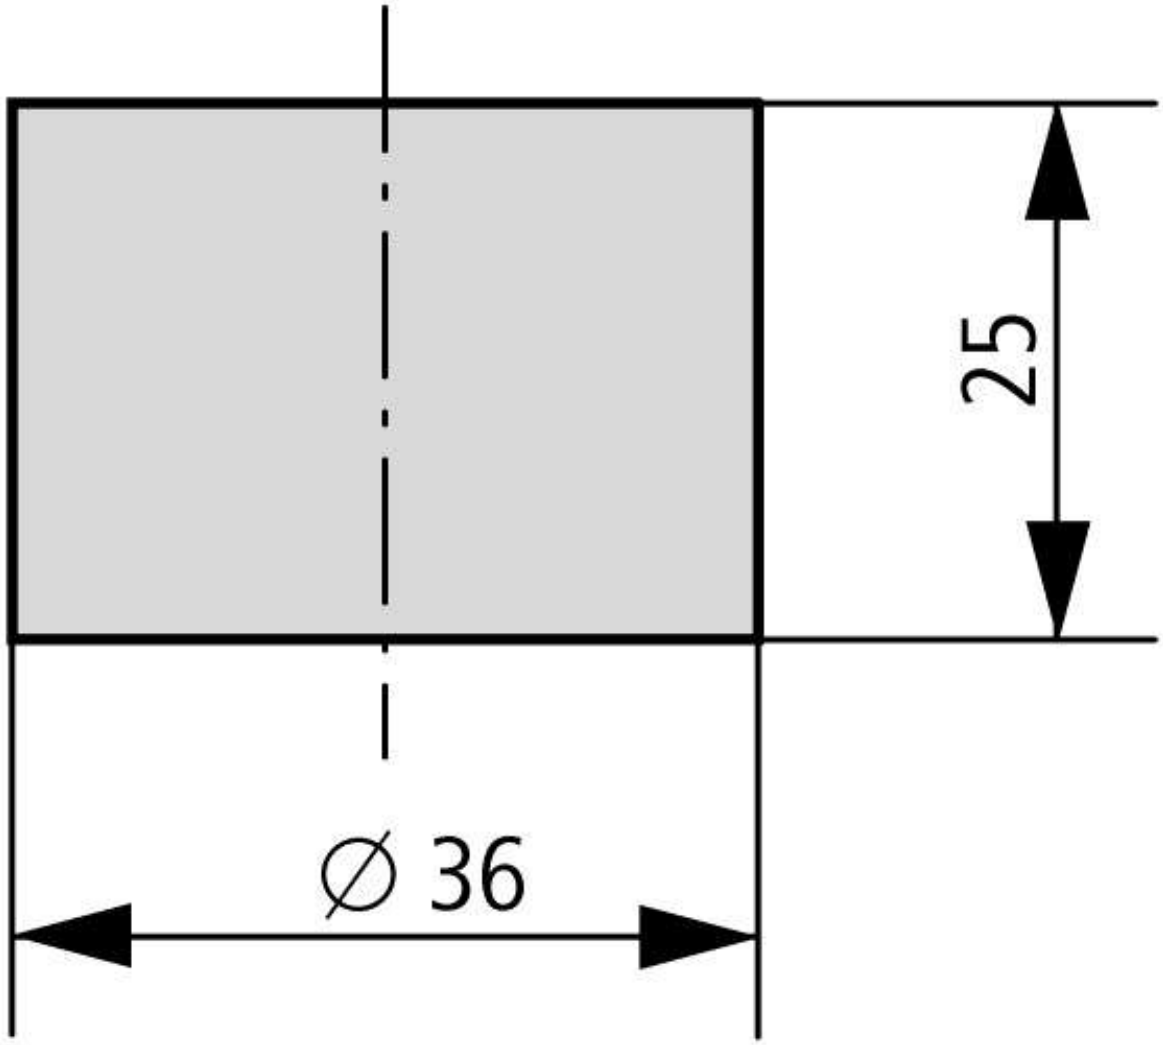

© 11/2013 by Eaton Industries GmbH