rotronic

Datenblatt - Fiche technique - Data sheet

11.04.5647




ROLINE Gold DisplayPort Kabel, DP ST – ST, 5,0m

ROLINE Gold Câble DisplayPort DP M – DP M, 5,0m

ROLINE Gold DisplayPort Cable, DP M – DP M, 5 m

ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

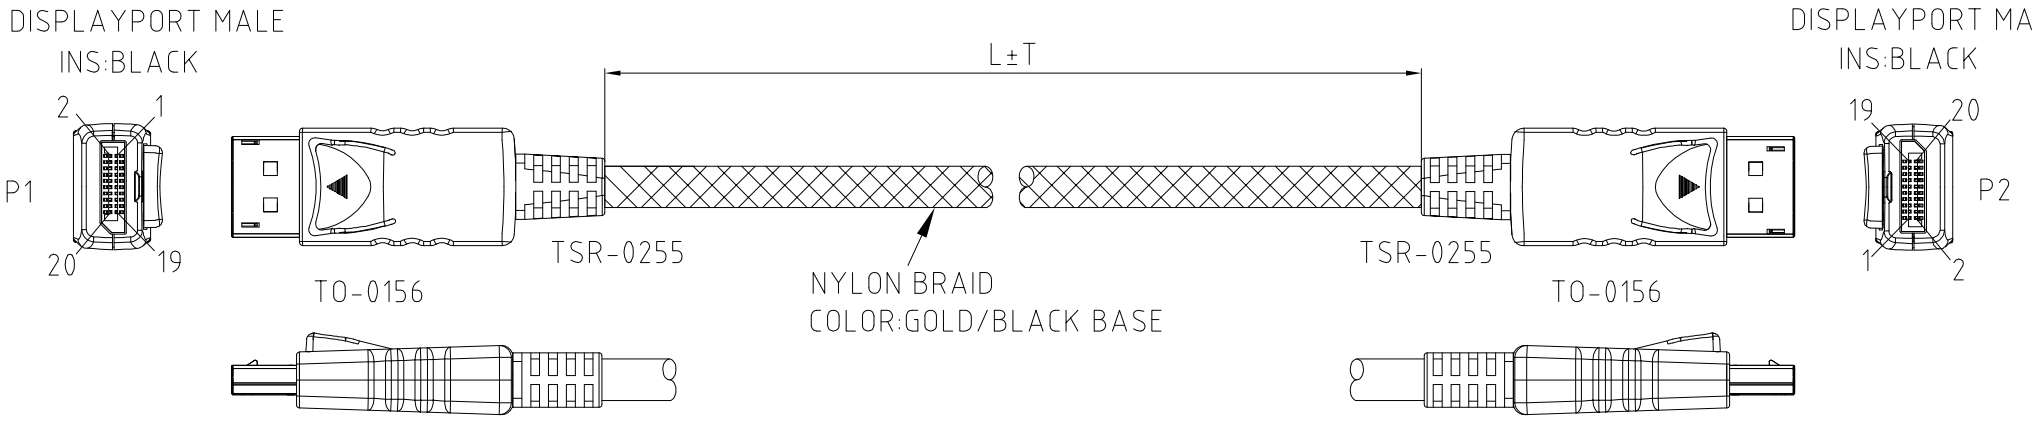

NOTE:

1.CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY
+Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY+
B.D(85%) PVC JACKET; OD:6.5±0.2mm COLOR:MATT BLACK(NK-K01) .

2.CONNECTOR:
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15u"
GOLD PLATED SHELL.

3.SHIELD:INNER MOLD MUST BE WRAPPED COPPER TO CONNECTOR SHELL & CABLE BRAID

4.HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR: GOLD

5.ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max .
(3)INSULATION RESISTANCE 10M ohm Min .

6.PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

DWG	P/N	L(mm)	T(mm)	PCS/INNER CARTON	PCS/CARTON
200-1484-3	11.04.5647-5	5000	50	5	10
200-1484-2	11.04.5646-10	3000	30	10	20
200-1484-1	11.04.5645-10	2000	30	10	20

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05


Draw: FANNIE 12/13/10'
Chek:
Engr:

Rotronic co., LTD.

Title: DISPLAYPORT ASS'Y CABLE
Customer P/N:
App'd:
Customer: T-RAG
Scale: NONE | Units: M/M | Third Angle Projection
Dwg No. 200-1484 | REV:A | Sheet: 1/2

LTR	REV.	DESCRIPTION	DATE

PIN OUT

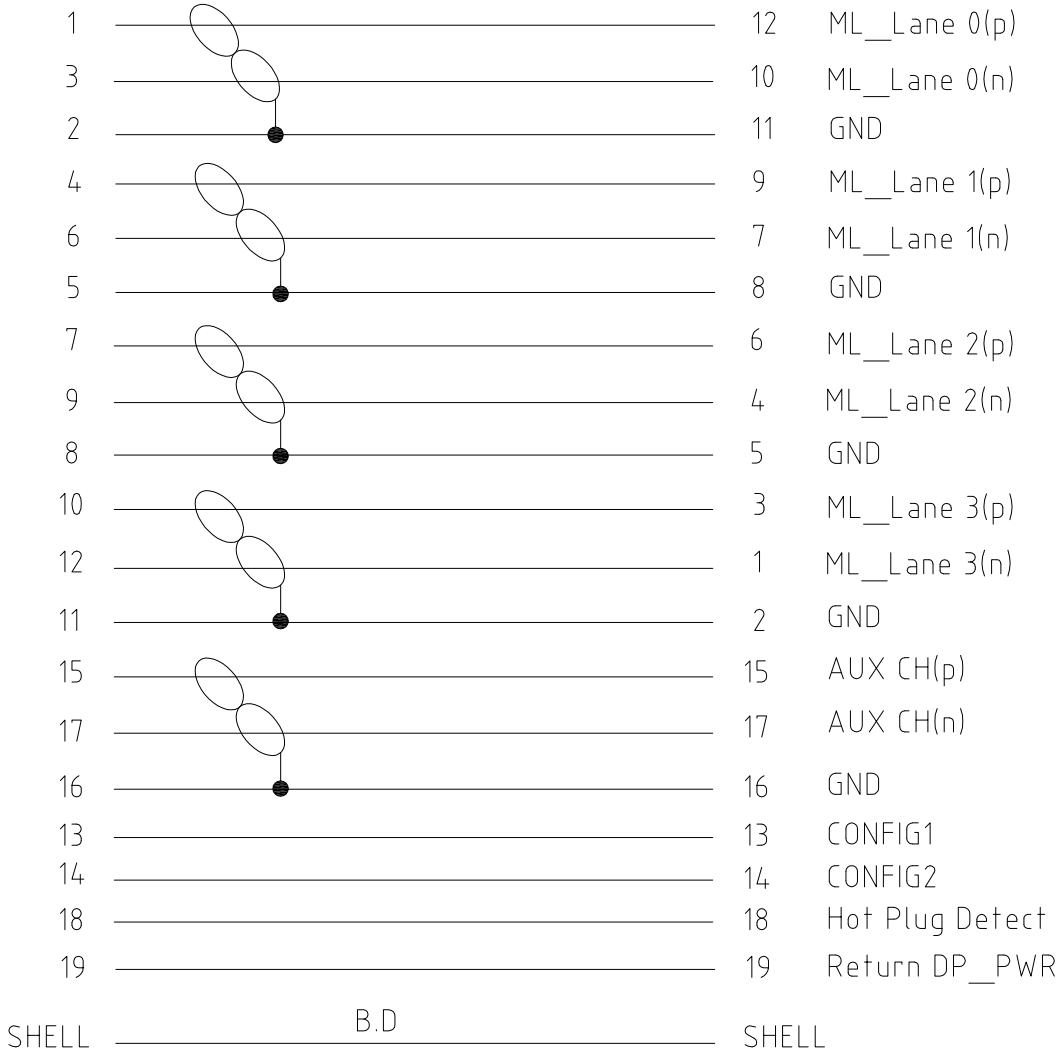

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw
FANNIE 12/13/10'

Chek

Engr

Rotronic co., LTD.

Title
DISPLAYPORT ASS'Y CABLE

Customer P/N

App'd

Customer: T-RAG

Scale NONE Units M/M Third Angle Projection

Dwg No. 200-1484

REV:A

Sheet. 2/2