894 LED Traffic Light


- High visibility LED Traffic Light in an innovative design
- Clear signalling even in direct sunlight thanks to clear lenses
- Simple mounting thanks to integrated mounting bracket
- Very good sideward visibility




LED Traffic Light (2 tier)



LED Traffic Light (3 tier)



Connection diagram



TECHNICAL SPECIFICATIONS:

Dimensions (D x W x H):	1 tier: 136 mm x 85 mm x 226 mm 2 tier: 136 mm x 85 mm x 311 mm 3 tier: 136 mm x 85 mm x 396 mm
Housing:	PC/ABS, grey
Lens:	PC, transparent
Fixing:	wall mounting
Installation position:	vertical
Connection:	Screwable connection with wire protection max. 1.5 mm²
Cable entry:	Cable diameter max. 13 mm
Duty cycle:	100 % ED

Life duration up to 50,000 hrs


ORDER SPECIFICATIONS:

Voltage	24 V ⎓	115 bis 230 V ~
Current Consumption	80 mA (red/yellow) 160 mA (green)	35 mA
red / green	**894 160 55**	**894 160 68**
red / yellow / green	**894 180 55**	**894 180 68**

Available from 3rd Quarter 2008.

ACCESSORIES:

Additional Fixing Bow underneath (see page 13) **975 894 01**

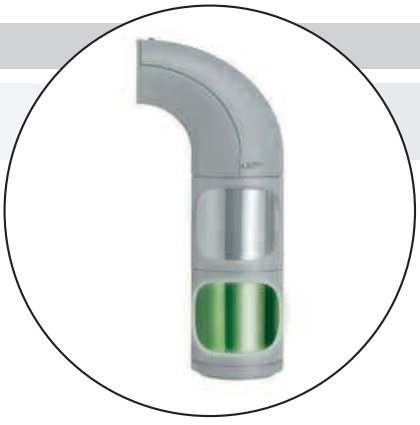

Clear lenses ensure signalling effect even in direct sunlight

In preparation

2 tier, with fixing bow

3 tier, with fixing bow

WERMA SIGNALTECHNIK