

PNOZ s7.2

PILZ
THE SPIRIT OF SAFETY

Safety relays

Operating Manual-21866-EN-10

This document is the original document.

All rights to this documentation are reserved by Pilz GmbH & Co. KG. Copies may be made for the user's internal purposes. Suggestions and comments for improving this documentation will be gratefully received.

Source code from third-party manufacturers or open source software has been used for some components. The relevant licence information is available on the Internet on the Pilz homepage.

Pilz®, PIT®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS p®, SafetyEYE®, SafetyNET p®, the spirit of safety® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries.


SD means Secure Digital

Introduction	**4**
Validity of documentation	4
Using the documentation	4
Definition of symbols	4
Safety	**5**
Intended use	5
Safety regulations	5
Safety assessment	5
Use of qualified personnel	6
Warranty and liability	6
Disposal	6
For your safety	6
Unit features	**7**
Safety features	**7**
Block diagram/terminal configuration	**8**
Function description	**8**
Installation	**8**
Wiring	**10**
Preparing for operation	**11**
Operation	**11**
Status indicators	11
Faults - malfunctions	**12**
Dimensions in mm	**12**
Technical details	**12**
Safety characteristic data	16
Supplementary data	**17**
Service life graph	17
Permitted operating height	19
Remove plug-in terminals	**20**
Order reference	**20**
EC declaration of conformity	**20**

Introduction

Validity of documentation

This documentation is valid for the product PNOZ s7.2. It is valid until new documentation is published.

This operating manual explains the function and operation, describes the installation and provides guidelines on how to connect the product.

Using the documentation

This document is intended for instruction. Only install and commission the product if you have read and understood this document. The document should be retained for future reference.

Definition of symbols

Information that is particularly important is identified as follows:



DANGER!

This warning must be heeded! It warns of a hazardous situation that poses an immediate threat of serious injury and death and indicates preventive measures that can be taken.



WARNING!

This warning must be heeded! It warns of a hazardous situation that could lead to serious injury and death and indicates preventive measures that can be taken.



CAUTION!

This refers to a hazard that can lead to a less serious or minor injury plus material damage, and also provides information on preventive measures that can be taken.



NOTICE

This describes a situation in which the product or devices could be damaged and also provides information on preventive measures that can be taken. It also highlights areas within the text that are of particular importance.

INFORMATION

This gives advice on applications and provides information on special features.

Safety

Intended use

The unit meets the requirements of EN 60947-5-1, EN 60204-1 and VDE 0113-1. The contact expansion module is used to increase the number of instantaneous safety contacts available on a base unit.

The max. achievable safety level depends on the base unit. The expansion module may not exceed this. The safety-related characteristic values stated under safety-related characteristic data [16] can only be achieved if the base unit also exhibits these values.

The following is deemed improper use in particular

- Any component, technical or electrical modification to the product,
- Use of the product outside the areas described in this manual,
- Use of the product outside the technical details (see Technical details [12]).

NOTICE

EMC-compliant electrical installation

The product is designed for use in an industrial environment. The product may cause interference if installed in other environments. If installed in other environments, measures should be taken to comply with the applicable standards and directives for the respective installation site with regard to interference.

Safety regulations

Safety assessment

Before using a device it is necessary to perform a safety assessment in accordance with the Machinery Directive.

Functional safety is guaranteed for the product as a single component. However, this does not guarantee the functional safety of the overall plant/machine. In order to achieve the required safety level for the overall plant/machine, define the safety requirements for the plant/machine and then define how these must be implemented from a technical and organisational standpoint.

Use of qualified personnel

The products may only be assembled, installed, programmed, commissioned, operated, maintained and decommissioned by competent persons.

A competent person is a qualified and knowledgeable person who, because of their training, experience and current professional activity, has the specialist knowledge required. To be able to inspect, assess and operate devices, systems and machines, the person has to be informed of the state of the art and the applicable national, European and international laws, directives and standards.

It is the company's responsibility only to employ personnel who

- Are familiar with the basic regulations concerning health and safety / accident prevention,
- Have read and understood the information provided in the section entitled Safety
- Have a good knowledge of the generic and specialist standards applicable to the specific application.

Warranty and liability

All claims to warranty and liability will be rendered invalid if

- The product was used contrary to the purpose for which it is intended,
- Damage can be attributed to not having followed the guidelines in the manual,
- Operating personnel are not suitably qualified,
- Any type of modification has been made (e.g. exchanging components on the PCB boards, soldering work etc.).

Disposal

- In safety-related applications, please comply with the mission time T_M in the safety-related characteristic data.
- When decommissioning, please comply with local regulations regarding the disposal of electronic devices (e.g. Electrical and Electronic Equipment Act).

For your safety

The unit meets all the necessary conditions for safe operation. However, please note the following:

- Note for overvoltage category III: If voltages higher than low voltage (>50 VAC or >120 VDC) are present on the unit, connected control elements and sensors must have a rated insulation voltage of at least 250 V.

Unit features

- Positive-guided relay outputs:
  - 4 safety contacts (N/O), instantaneous
  - 1 auxiliary contact (N/C), instantaneous
- Connection option for expansion modules
- LED for:
  - Input status, channel 1
  - Input status, channel 2
  - Switch status of the safety contacts
- Plug-in connection terminals (either spring-loaded terminal or screw terminal)
- See order reference for unit types

Safety features

The unit meets the following safety requirements:

- The contact expander module expands an existing circuit. As the output relays are monitored via the base unit's feedback loop, the safety functions on the existing circuit are transferred to the contact expander module.
- The safety function remains effective in the case of a component failure.
- Earth fault in the feedback loop:
  Detected, depending on the base unit that is used.
- Earth fault in the input circuit:
  The output relays de-energise and the safety contacts open.

Block diagram/terminal configuration

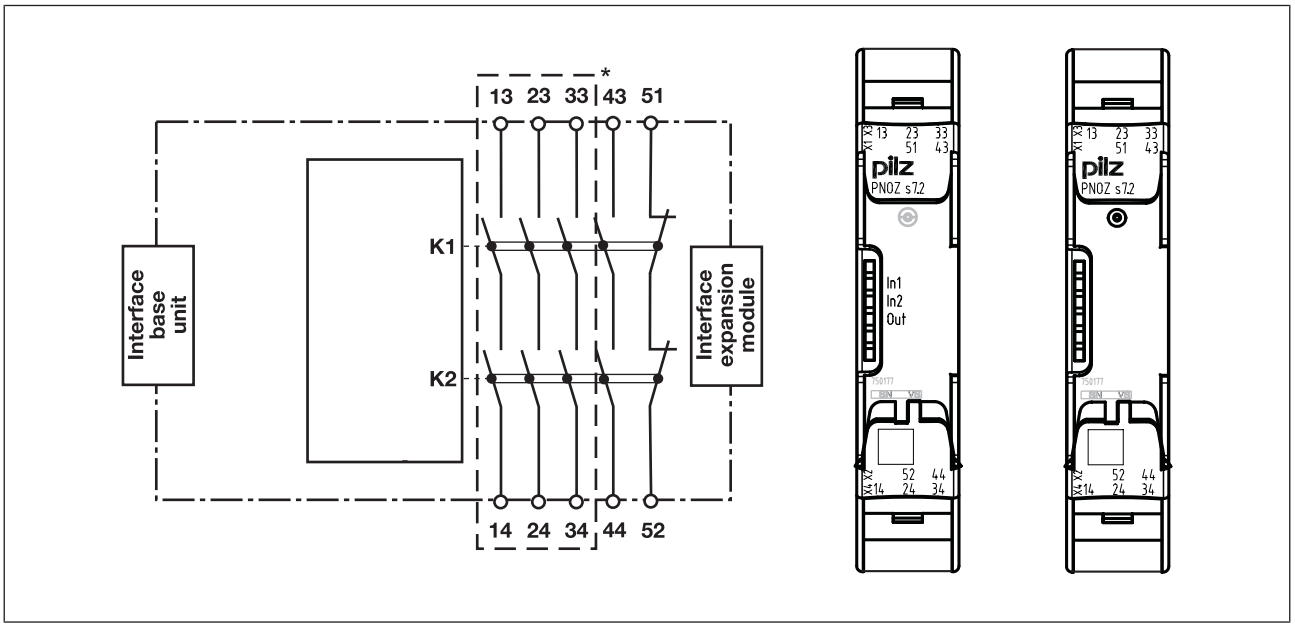


Fig.: Centre: Front view with cover, right: Front view without cover

*Safe separation from non-marked area in accordance with EN 60947-1, 6 kV, basic insulation between all safety contacts.

Function description

with PNOZsigma s7.1:

- Dual-channel operation and supply voltage via PNOZsigma connector

with PNOZsigma expander modules:

- Dual-channel operation and supply voltage via PNOZsigma connector

Installation

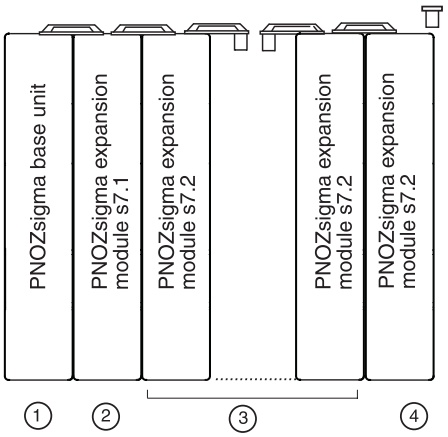
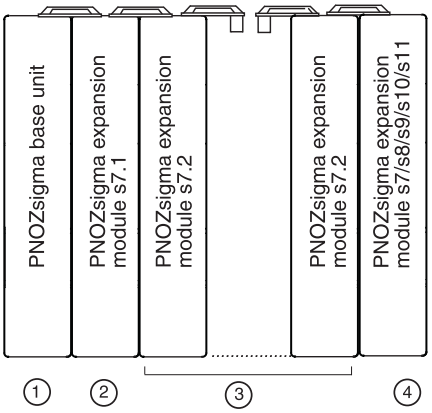
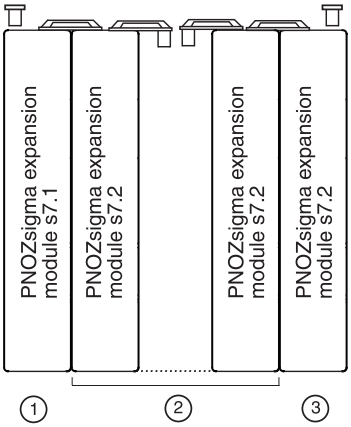
Connect contact expansion module PNOZ s7.2 to PNOZsigma contact expansion modules

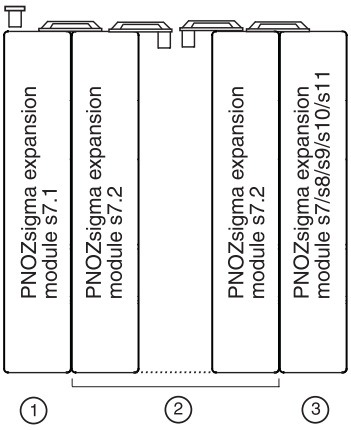
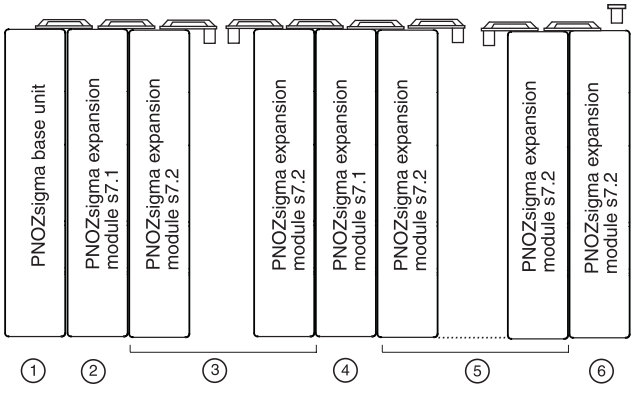
- Connect the contact expansion modules using the connector supplied.

Control cabinet installation

- The safety relay should be installed in a control cabinet with a protection type of at least IP54.
- Use the notch on the rear of the unit to attach it to a DIN rail.
- Ensure the unit is mounted securely on a vertical DIN rail (35 mm) by using a fixing element (e.g. retaining bracket or an end angle).

Push the unit upwards or downwards before lifting it from the DIN rail.

Expansion options	Please note the max. power consumption of the contact expansion modules (see technical data PNOZ s7.1).
①: Base unit ②: Contact expansion module PNOZ s7.1 ③: Contact expansion module PNOZ s7.2 ④: Contact expansion module PNOZ s7.2 with terminator	
①: Base unit ②: Contact expansion module PNOZ s7.1 ③: Contact expansion module PNOZ s7.2 ④: Expansion module PNOZ s7, s8, s9, s10, s11 as a terminator	
①: Contact expansion module PNOZ s7.1 with terminator ②: Contact expansion module PNOZ s7.2 ③: Contact expansion module PNOZ s7.2 with terminator	

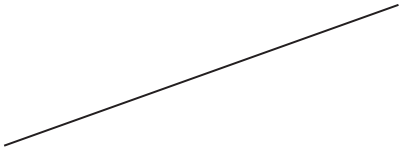
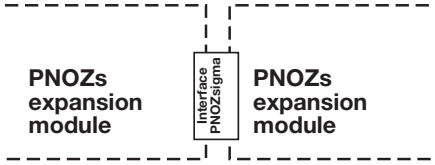
Expansion options	Please note the max. power consumption of the contact expansion modules (see technical data PNOZ s7.1).
①: Contact expansion module PNOZ s7.1 with terminator ②: Contact expansion module PNOZ s7.2 ③: Expansion module PNOZ s7, s8, s9, s10, s11 as a terminator	
①: Base unit ②: Contact expansion module PNOZ s7.1 ③: Contact expansion module PNOZ s7.2 ④: Contact expansion module PNOZ s7.1 ⑤: Contact expansion module PNOZ s7.2 ⑥: Contact expansion module PNOZ s7.2 with terminator	

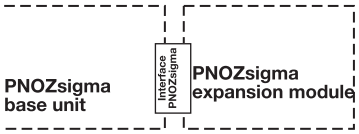
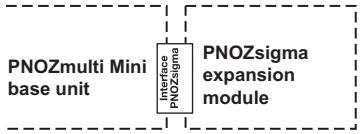
Wiring

Please note:

- Information given in the "Technical details [📖 12]" must be followed.
- Outputs 13-14, 23-24, 33-34, 43-44 are safety contacts; outputs 51 -52 are auxiliary contacts (e.g. for display).
- Auxiliary contact 51-52 should **not** be used for safety circuits!
- To prevent contact welding, a fuse should be connected before the output contacts (see Technical details [📖 12]).
- Use copper wire that can withstand 60/75 °C.
- Sufficient fuse protection must be provided on all output contacts with capacitive and inductive loads.

Preparing for operation

Supply voltage/input circuit/ feedback loop	AC	DC
Contact expansion module PNOZ s7.2		

Connection to PNOZsigma base unit/PNOZmulti Mini base unit	Base unit: Safety relay PNOZ-sigma	Base unit: Small control system PNOZmulti Mini
The feedback loop is connected and evaluated via the connector		

Operation

When the relay outputs are switched on, the mechanical contact on the relay cannot be tested automatically. Depending on the operational environment, measures to detect the non-opening of switching elements may be required under some circumstances.

When the product is used in accordance with the European Machinery Directive, a check must be carried out to ensure that the safety contacts on the relay outputs open correctly. Open the safety contacts (switch off output) and start the device again, so that the internal diagnostics can check that the safety contacts open correctly

- for SIL CL 3/PL e at least 1x per month
- for SIL CL 2/PL d at least 1x per year



NOTICE

The safety function should be checked after initial commissioning and each time the plant/machine is changed. The safety functions may only be checked by qualified personnel.

LEDs indicate the status and errors during operation:

☼ LED on

Status indicators

☼ **IN1**
Channel 1 actuated.

☼ **IN2**
Channel 2 actuated.

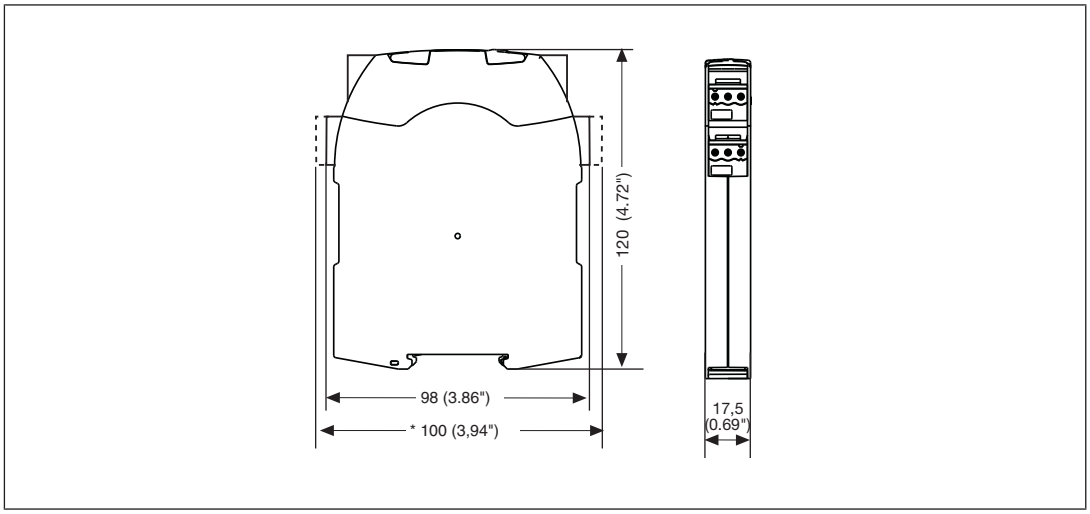
☼ **IN1, IN2, OUT**
Safety contacts are closed.

Faults - malfunctions

- Contact malfunctions: If the contacts have welded, reactivation will not be possible after the input circuit has opened.

Dimensions in mm

*with spring-loaded terminals



Technical details

General	750177	751177
Approvals	**CCC, CE, EAC (Eurasian), TÜV, cULus Listed**	**CCC, CE, EAC (Eurasian), TÜV, cULus Listed**
Electrical data	**750177**	**751177**
Supply voltage		
Voltage	**24 V**	**24 V**
Kind	**DC**	**DC**
Power consumption	**2 W**	**2 W**
Duty cycle	**100 %**	**100 %**
Relay outputs	**750177**	**751177**
Number of output contacts		
Safety contacts (N/O), instant-aneous	**4**	**4**
Auxiliary contacts (N/C)	**1**	**1**
Max. short circuit current IK	**1 kA**	**1 kA**
Utilisation category		
In accordance with the standard	**EN 60947-4-1**	**EN 60947-4-1**

Relay outputs	750177	751177
Utilisation category of safety contacts		
AC1 at	**240 V**	**240 V**
Min. current	**0,01 A**	**0,01 A**
Max. current	**6 A**	**6 A**
Max. power	**1500 VA**	**1500 VA**
DC1 at	**24 V**	**24 V**
Min. current	**0,01 A**	**0,01 A**
Max. current	**6 A**	**6 A**
Max. power	**150 W**	**150 W**
Utilisation category of auxiliary contacts		
AC1 at	**240 V**	**240 V**
Min. current	**0,01 A**	**0,01 A**
Max. current	**2 A**	**2 A**
Max. power	**500 VA**	**500 VA**
DC1 at	**24 V**	**24 V**
Min. current	**0,01 A**	**0,01 A**
Max. current	**2 A**	**2 A**
Max. power	**50 W**	**50 W**
Utilisation category		
In accordance with the standard	**EN 60947-5-1**	**EN 60947-5-1**
Utilisation category of safety contacts		
AC15 at	**230 V**	**230 V**
Max. current	**5 A**	**5 A**
DC13 (6 cycles/min) at	**24 V**	**24 V**
Max. current	**5 A**	**5 A**
Utilisation category of auxiliary contacts		
AC15 at	**230 V**	**230 V**
Max. current	**2 A**	**2 A**
DC13 (6 cycles/min) at	**24 V**	**24 V**
Max. current	**2 A**	**2 A**
Utilisation category in accordance with UL		
Voltage	**240 V AC G.U. (same polarity)**	**240 V AC G.U. (same polarity)**
With current	**6 A**	**6 A**
Voltage	**24 V DC G. U.**	**24 V DC G. U.**
With current	**6 A**	**6 A**

Relay outputs	750177	751177
External contact fuse protection, safety contacts		
In accordance with the standard	**EN 60947-5-1**	**EN 60947-5-1**
Max. melting integral	**260 A²s**	**260 A²s**
Blow-out fuse, quick	**10 A**	**10 A**
Blow-out fuse, slow	**6 A**	**6 A**
Blow-out fuse, gG	**10 A**	**10 A**
Circuit breaker 24V AC/DC, characteristic B/C	**6 A**	**6 A**
External contact fuse protection, auxiliary contacts		
Max. melting integral	**160 A²s**	**160 A²s**
Blow-out fuse, quick	**4 A**	**4 A**
Blow-out fuse, slow	**2 A**	**2 A**
Blow-out fuse, gG	**4 A**	**4 A**
Circuit breaker 24 V AC/DC, characteristic B/C	**2 A**	**2 A**
Contact material	**AgCuNi + 0,2 µm Au**	**AgCuNi + 0,2 µm Au**
Conventional thermal current while loading several contacts	**750177**	**751177**
Ith per contact at UB DC; AC1: 240 V, DC1: 24 V		
Conv. therm. current with 1 contact	**6 A**	**6 A**
Conv. therm. current with 2 contacts	**5,5 A**	**5,5 A**
Conv. therm. current with 3 contacts	**4,5 A**	**4,5 A**
Conv. therm. current with 4 contacts	**4 A**	**4 A**
Times	**750177**	**751177**
Switch-on delay		
With automatic start after power on typ.	**30 ms**	**30 ms**
With automatic start after power on max.	**50 ms**	**50 ms**
Delay-on de-energisation		
With E-STOP typ.	**18 ms**	**18 ms**
With E-STOP max.	**30 ms**	**30 ms**
With power failure typ.	**18 ms**	**18 ms**
With power failure max.	**30 ms**	**30 ms**
Environmental data	**750177**	**751177**
Climatic suitability	**EN 60068-2-78**	**EN 60068-2-78**
Ambient temperature		
Temperature range	**-10 - 55 °C**	**-10 - 55 °C**
Storage temperature		
Temperature range	**-40 - 85 °C**	**-40 - 85 °C**

Environmental data	750177	751177
Climatic suitability		
Humidity	**93 % r. h. at 40 °C**	**93 % r. h. at 40 °C**
Condensation during operation	**Not permitted**	**Not permitted**
EMC	**EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1**	**EN 60947-5-1, EN 61000-6-2, EN 61000-6-4, EN 61326-3-1**
Vibration		
In accordance with the standard	**EN 60068-2-6**	**EN 60068-2-6**
Frequency	**10 - 55 Hz**	**10 - 55 Hz**
Amplitude	**0,35 mm**	**0,35 mm**
Airgap creepage		
In accordance with the standard	**EN 60947-1**	**EN 60947-1**
Overvoltage category	**III**	**III**
Pollution degree	**2**	**2**
Rated insulation voltage	**250 V**	**250 V**
Rated impulse withstand voltage	**6 kV**	**6 kV**
Protection type		
Housing	**IP40**	**IP40**
Terminals	**IP20**	**IP20**
Mounting area (e.g. control cabinet)	**IP54**	**IP54**
Mechanical data	**750177**	**751177**
Mounting position	**Any**	**Any**
Mechanical life	**10,000,000 cycles**	**10,000,000 cycles**
Material		
Bottom	**PC**	**PC**
Front	**PC**	**PC**
Top	**PC**	**PC**
Connection type	**Screw terminal**	**Spring-loaded terminal**
Mounting type	**plug-in**	**plug-in**
Conductor cross section with screw terminals		
1 core flexible	**0,25 - 2,5 mm², 24 - 12 AWG**	–
2 core with the same cross section, flexible with crimp connectors, no plastic sleeve	**0,25 - 1 mm², 24 - 16 AWG**	–
2 core with the same cross section, flexible without crimp connectors or with TWIN crimp connectors	**0,2 - 1,5 mm², 24 - 16 AWG**	–
Torque setting with screw terminals	**0,5 Nm**	–
Conductor cross section with spring-loaded terminals: Flexible with/without crimp connector	–	**0,2 - 2,5 mm², 24 - 12 AWG**
Spring-loaded terminals: Terminal points per connection	–	**2**
Stripping length with spring-loaded terminals	–	**9 mm**

Mechanical data	750177	751177
Dimensions		
Height	**98 mm**	**100 mm**
Width	**17,5 mm**	**17,5 mm**
Depth	**120 mm**	**120 mm**
Weight	**170 g**	**170 g**

Where standards are undated, the 2017-01 latest editions shall apply.

Safety characteristic data

NOTICE

You must comply with the safety-related characteristic data in order to achieve the required safety level for your plant/machine.

Operating Mode	EN ISO 13849-1: 2015 PL	EN ISO 13849-1: 2015 Category	EN 62061 SIL CL	EN 62061 PFH_D [1/h]	IEC 61511 SIL	IEC 61511 PFD	EN ISO 13849-1: 2015 T_M [year]
Safety contacts, instantaneous	**PL e**	**Cat. 4**	**SIL CL 3**	**2,31E-09**	**SIL 3**	**2,03E-06**	**20**

All the units used within a safety function must be considered when calculating the safety characteristic data.

INFORMATION

A safety function's SIL/PL values are **not** identical to the SIL/PL values of the units that are used and may be different. We recommend that you use the PAScal software tool to calculate the safety function's SIL/PL values.

Supplementary data

CAUTION!

It is essential to consider the relay's service life graphs. The relay outputs' safety-related characteristic data is only valid if the values in the service life graphs are met.

The PFH value depends on the switching frequency and the load on the relay output.
If the service life graphs are not accessible, the stated PFH value can be used irrespective of the switching frequency and the load, as the PFH value already considers the relay's B10d value as well as the failure rates of the other components.

Service life graph

The service life graphs indicate the number of cycles from which failures due to wear must be expected. The wear is mainly caused by the electrical load; the mechanical load is negligible.

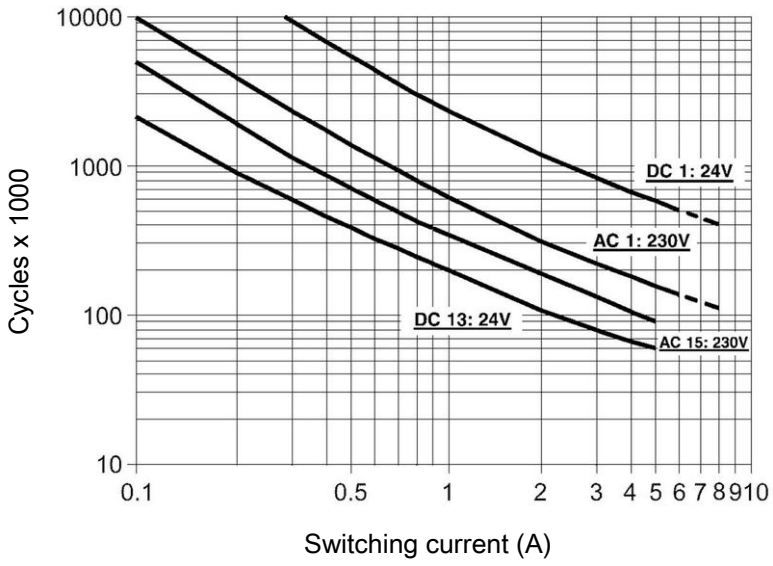


Fig.: Service life graphs at 24 V DC and 230 V AC

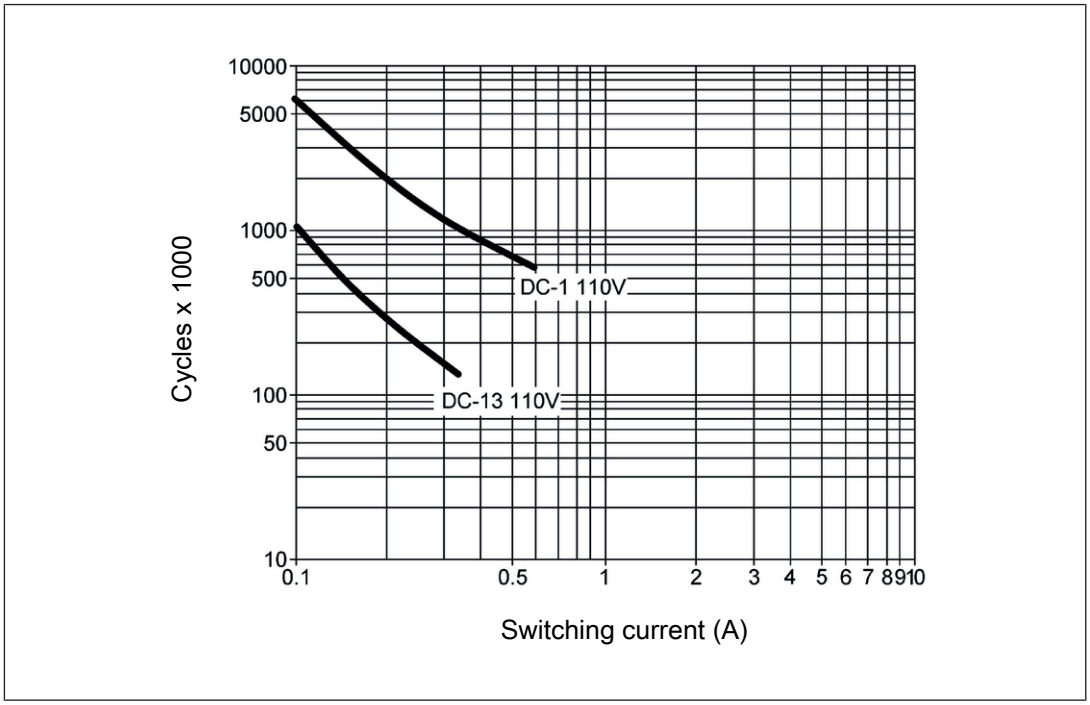


Fig.: Service life graphs at 110 V DC

Example

- Inductive load: 0.2 A
- Utilisation category: AC15
- Contact service life: 2 000 000 cycles

Provided the application to be implemented requires fewer than 2 000 000 cycles, the PFH value (see Technical details [12]) can be used in the calculation.

To increase the service life, sufficient spark suppression must be provided on all output contacts. With capacitive loads, any power surges that occur must be noted. With DC contactors, use flywheel diodes for spark suppression.

Permitted operating height

The values stated in the technical details apply to the use of the device in operating heights up to max. 2000 m above sea level. When used in greater heights, constraints have to be taken into account:

- Permitted maximum operating height 5000 m
- Reduction of rated insulation voltage and rated impulse withstand voltage for applications with safe separation:

Maximum operation height	Rated insulation voltage	Overvoltage category	Max. rated impulse withstand voltage
3000 m	150 V	II	2.5 kV
	100 V	III	2.5 kV
4000 m	150 V	II	2.5 kV
	100 V	III	2.5 kV
5000 m	150 V	II	2.5 kV
	100 V	III	2.5 kV

- Reduction of rated insulation voltage and rated impulse withstand voltage for applications with basic insulation:

Maximum operation height	Rated insulation voltage	Overvoltage category	Max. rated impulse withstand voltage
3000 m	250 V	II	2.5 kV
	150 V	III	2.5 kV
4000 m	250 V	II	2.5 kV
	150 V	III	2.5 kV
5000 m	250 V	II	2.5 kV
	150 V	III	2.5 kV

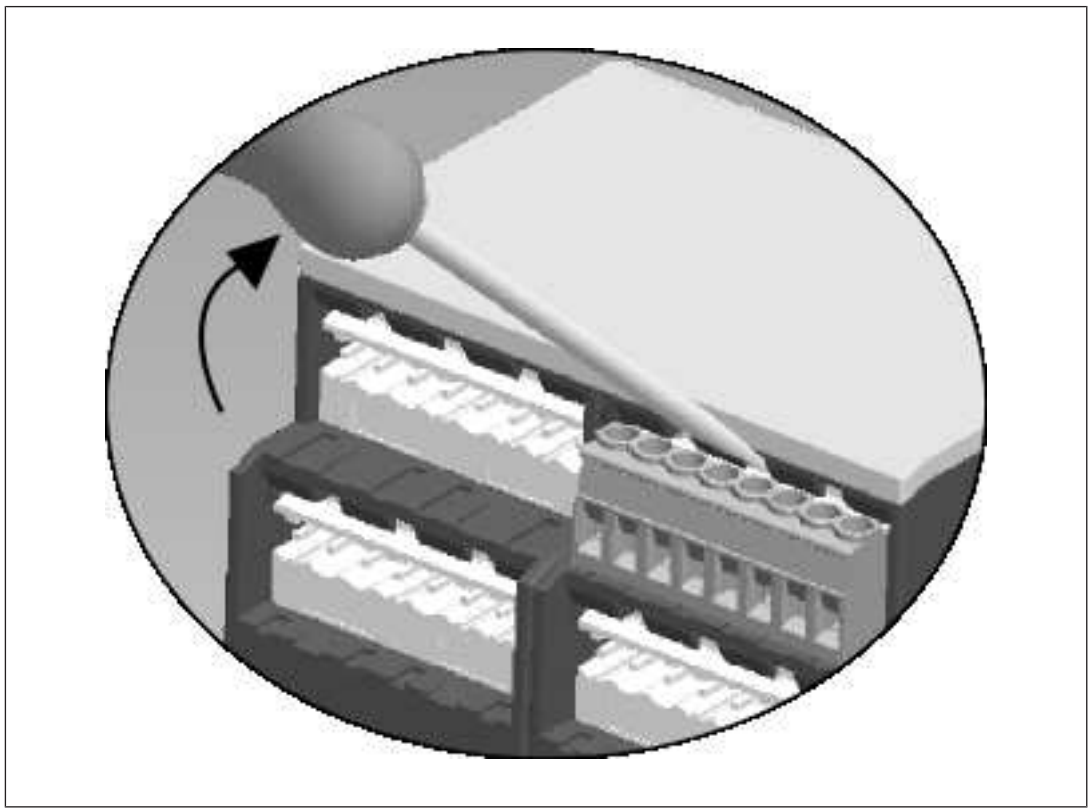
- From an operating height of 2000 m the max. permitted ambient temperature is reduced by 0.5 °C/100 m

Operating height	Permitted ambient temperature
3000 m	50 °C
4000 m	45 °C
5000 m	40 °C

Remove plug-in terminals

Procedure: Insert the screwdriver into the housing recess behind the terminal and lever the terminal out.

Do **not** remove the terminals by pulling the cables!



Order reference

Product type	Features	Connection type	Order No.
PNOZ s7.2	24 VDC	Screw terminals	750 177
PNOZ s7.2 C	24 VDC	Spring-loaded terminals	751 177

EC declaration of conformity

This product/these products meet the requirements of the directive 2006/42/EC for machinery of the European Parliament and of the Council. The complete EC Declaration of Conformity is available on the Internet at www.pilz.com/downloads.
Representative: Norbert Fröhlich, Pilz GmbH & Co. KG, Felix-Wankel-Str. 2, 73760 Ostfildern, Germany

Support

Technical support is available from Pilz round the clock.

Americas
Brazil
+55 11 97569-2804
Canada
+1 888-315-PILZ (315-7459)
Mexico
+52 55 5572 1300
USA (toll-free)
+1 877-PILZUSA (745-9872)

Asia
China
+86 21 60880878-216
Japan
+81 45 471-2281
South Korea
+82 31 450 0680

Australia
+61 3 95600621

Europe
Austria
+43 1 7986263-0
Belgium, Luxembourg
+32 9 3217575
France
+33 3 88104000
Germany
+49 711 3409-444
Ireland
+353 21 4804983
Italy, Malta
+39 0362 1826711
Scandinavia
+45 74436332
Spain
+34 938497433
Switzerland
+41 62 88979-30
The Netherlands
+31 347 320477
Turkey
+90 216 5775552
United Kingdom
+44 1536 462203

You can reach our international hotline on:
+49 711 3409-444
support@pilz.com

Pilz develops environmentally-friendly products using ecological materials and energy-saving technologies. Offices and production facilities are ecologically designed, environmentally-aware and energy-saving. So Pilz offers sustainability, plus the security of using energy-efficient products and environmentally-friendly solutions.

Energy saving by Pilz

BLUECOMPETENCE Alliance Member
Partner of the Engineering Industry Sustainability Initiative

pilz
Partner of:
The Best of German Engineering

Pilz GmbH & Co. KG
Felix-Wankel-Straße 2
73760 Ostfildern, Germany
Tel.: +49 711 3409-0
Fax: +49 711 3409-133
info@pilz.com
www.pilz.com

PILZ
THE SPIRIT OF SAFETY

21866-EN-10, 2017-06 Printed in Germany
© Pilz GmbH & Co. KG, 2015

CMSE®, InduraNET p®, PAS4000®, PAScal®, PASconfig®, Pilz®, PIT®, PLID®, PMCprimo®, PMCprotego®, PMCtendo®, PMD®, PMI®, PNOZ®, Primo®, PSEN®, PSS®, PVIS®, SafetyBUS SafetyEYE®, SafetyNET p®, THE SPIRIT OF SAFETY® are registered and protected trademarks of Pilz GmbH & Co. KG in some countries. We would point out that product features m from the details stated in this document, depending on the status at the time of publication and the scope of the equipment. We accept no responsibility for the validity, accuracy and entirety of the text and graphics presented in this information. Please contact our Technical Support if you have any questions.