
ORDER CODE
YRK-280-9400K

YORK ABRASIVES


YRK-280-9400K
5 036140 012851

250(H) x 170(W) x 50(D)mm
443g Gross Weight


LIGHT INDUSTRIAL FERROUS METAL POLISHING KIT

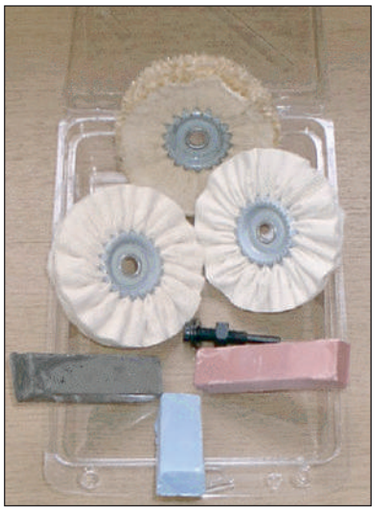


This kit produces a 'mirror finish' on ferrous metals.
The kit incorporates a unique non-loosening reverse-wound arbor that can be drill mounted or used in a bench grinder.

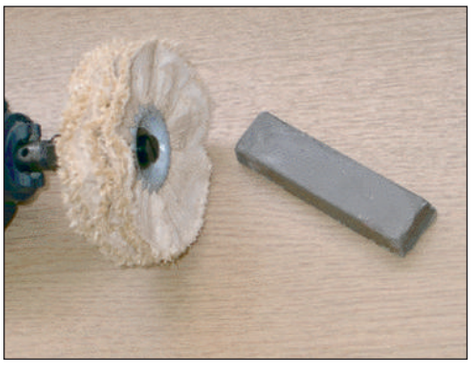

To produce a mirror finish three polishing stages are required starting with the sisal mop and the Carbrax composition at between 2500 and 3000 rpm. The polishing compound is applied to the underside of the rotating mop with the mop rotating away from the bar.

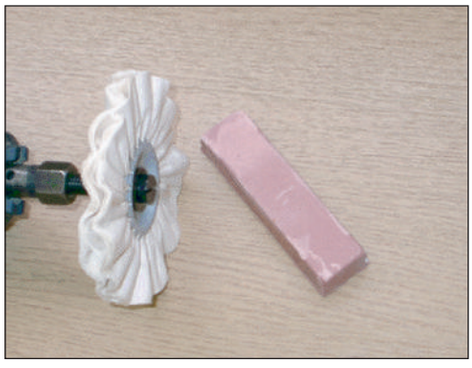

The second operation uses the 290 polishing mop which is the harder of the two white mops together the pink 1487 polishing composition. Again the polishing compound is applied to the underside of the rotating mop with the mop rotating away from the bar again with the rotation set between 2500 and 3000 rpm.

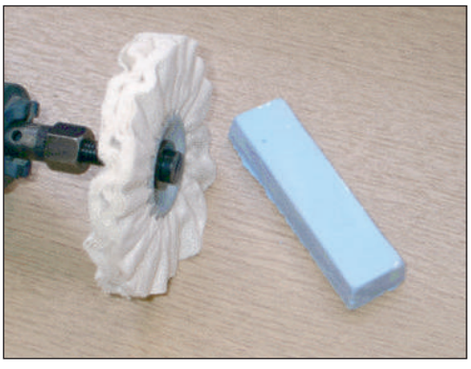

To produce a mirror finish the softest M05 mop is applied using the blue Steelbrite polishing compound. Again the polishing compound is applied to the underside of the rotating mop with the mop rotating away from the bar. The metal can be polished to a mirror finish with the rotation set between 2500 and 3000 rpm.

Always observe normal polishing safety rules and wear protective goggles and dusk mask if necessary.

P.O. Box 14, Wigston, Leicester, England, LE18 1AT.