

STAINLESS TOOL
TITANIUM TOOL

TOOL SET

TOOL CASE

SOCKET
WRENCHHEXAGON
WRENCHT-TYPE
WRENCHSPANNER
OFFSET WRENCH

SCREWDRIVER

BIT

ADJUSTABLE
WRENCH
PLIERSSPECIALIZED
CAR EQUIPMENT

CYCLE TOOL

LED LIGHT

OTHER HAND
TOOLSTORQUE
WRENCH

AIR TOOL



6




3P-16S



3P-20.8S


Example



Specialist for installation and removing the plug socket.
Support 12pt type plug wrench, and also compatible with 6pt type plug.
Easier to access in narrow space with thin-wall design and magnet included.



12



Best tool for plug exchange of horizontally-opposed engine.
Use 17 mm ratchet ring wrench to loose, then remove one piece when the gap becomes narrower.

Best for 86/BRZ.



6





PG86S

How to use

The ideal tool for plug exchange such as 86·BRZ that has horizontally-opposed cylinder engine.

Haven't you experienced these?

As for horizontally-opposed cylinder engine, clearance of engine head and tire house is narrow, so the ordinary plug socket can work well. The sparking plug in the place which can't be seen directly can't be removed.

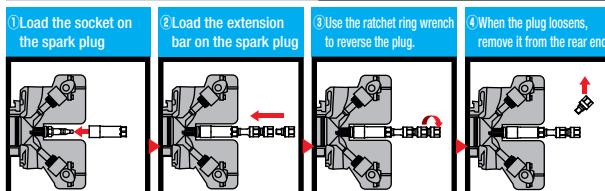

PLUG SOCKET (6pt. with MAGNET)

Models	Across Flat (mm)	Dimensions (mm)							Qty./Carton (Generally)	Weight (g)
		S	D ₁	D ₂	L ₁	W	L	d		
3P-14S	14	18.5	18.5	6.5	17	64	13	10	6	66
3P-16S	16	20.0	18.5	6.5	17	64	13	10	6	70
3P-18S	18	23.5	18.5	6.5	17	64	13	10	6	85
3P-19S	19	25.0	18.5	6.5	17	64	14	10	6	80
3P-20.8S	20.8	26.5	18.5	6.5	17	64	14	10	6	85

- 6 Points strong drive
- Thin wall
- Only for spark plug



PLUG SOCKET (12pt. with MAGNET)

Models	Across Flat (mm)	Dimensions (mm)							Qty./Carton (Generally)	Weight (g)
		S	D ₁	D ₂	L ₁	W	L	d		
3PW-14S	14	18.5	18.5	6.5	17	64	13	10	6	66
3PW-16S	16	20.0	18.5	6.5	17	64	13	10	6	70

- 12 Points strong drive
- Thin wall
- Only for spark plug



CAUTION

• Not normal socket. Wall is thin as is exclusively for spark plug.

PLUG SOCKET SET

Models PG86S

Contents 4 Items

Descriptions	Models	Refer
Plug socket	3P-14S	P.388
Extension bar	EX32-32(2), EX32-50	P.388
• Thin wall		
• Only for spark plug		

CAUTION

• Not normal socket. Wall is thin as is exclusively for spark plug.

Example



86/BRZ



Support 2 types of tightening work
Concave: ratchet handle
Convex: offset wrench

EXTENSION BAR

Models	Sq.dr. (mm)	Dimensions (mm)					Weight (g)
		W	L ₁	L ₂	L	d	
EX32-32	9.5	17	13	21.5	32	10.5	36
EX32-50	9.5	17	13	39.5	50	10.5	49

※ We do not sell parts by part.

